


WE HAVE AN ATTACHMENT FOR THAT.®

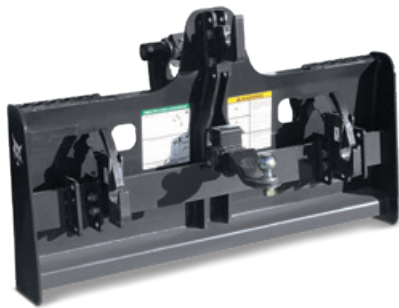

3-POINT HITCH ADAPTER

Add versatility to your loader or utility work machine.

- Enable the use of Category 1 and 2 implements
- Bob-Tach attachment mounting system offers quick-mounting capabilities
- Adjustable top link for added versatility
- Offers 2-inch receiver for moving trailers

Approved machines: CTL SSL TC



ANGLE BLADE

Level, backfill, grade and remove snow on farms or acreages.

- Blade can be rotated 360 degrees and angled to move material from either side
- Use the blade in forward or reverse
- Replaceable cutting edge

Approved machines: CT

	60 in.	72 in.	84 in.
Weight	308 lb.	332 lb.	348 lb.
Length	40 in.	40 in.	40 in.
Hitch	Category 1	Category 1	Category 1
Offset (Right or Left)	12 in.	12 in.	12 in.

AT = Articulating Tractor CT = Compact Tractor CTL = Compact Track Loader CWL = Compact Wheel Loader MTL = Mini Track Loader MX = Excavator


ANGLE BROOM

Sweep driveways, sidewalks, parking lots and more.



- Waved design of the bristles creates a cleaner path and sweeps more snow or debris in one pass
- Heavy-duty, easy-to-replace polypropylene broom bristles (steel bristles available)
- Reverse bristle rotation available on the 68- and 84-inch angle brooms for enhanced cleaning along curbs, corners and around obstacles
- **NEW:** Also available for articulating tractor

Approved machines: **AT** **CTL** **CWL** **MTL** **SAL** **SSL** **TC**

	52 in.	64 in.	68 in.	84 in.	AT450 
Operating Weight	355 lb.	385 lb.	860 lb.	944 lb.	395 lb.
Overall Width	54.5 in.	67.5 in.	79.6 in.	96.4 in.	63 in.
Sweep Width (Straight)	51.5 in.	63.5 in.	68 in.	84 in.	52 in.
Sweep Width (Fully Angled)	48 in.	60 in.	63 in.	77 in.	47 in.
Broom Angling	Hydraulic	Hydraulic	Hydraulic	Hydraulic	25°; Hydro Drive, Oscillation Fixed
Broom Bristle Diameter	26 in.	26 in.	32 in.	32 in.	26 in.
Flow Range	9-18 gpm	9-18 gpm	8-24 gpm	15-28 gpm	–

AUGER

Dig holes with speed and plumb-line accuracy.



- Choose from varying options that offer a choice between torque and rpm
- Multiple bit types and teeth to match your digging conditions
- Exceptional digging depth when paired with Bobcat machines

Approved machines: **CTL** **CWL** **MTL** **MX** **SAL** **SSL** **TL**

	12PH	14PH	20PH	25PH	35PH	50PH
Operating Weight	140 lb.	140 lb.	140 lb.	140 lb.	285 lb.	285 lb.
Length	28 in.	28 in.	28 in.	28 in.	39.7 in.	39.7 in.
Width	10 in.	10 in.	10 in.	10 in.	11.6 in.	11.6 in.
Height	10 in.	10 in.	10 in.	10 in.	11.4 in.	11.4 in.

BACKHOE – COMPACT TRACTOR

Turn your compact tractor into a powerful excavator.



- Use the backhoe for general-purpose digging and trenching
- Sub-frame included to attach to your compact tractor

Approved machines: **CT**

	BH66	BH76	BH86	BH86-5
Shipping Weight (Without Bucket)	657 lb.	880 lb.	1102 lb.	1102 lb.
Digging Depth (2 ft. Flat Bottom)	73 in.	90 in.	96 in.	94 in.
Reach From Swing Center Line	100 in.	122 in.	126 in.	125 in.
Dig Force – Bucket	2240 lbf.	3075 lbf.	3748 lbf.	3532 lbf.
Stabilizer Type	Hydraulic Fold Down	Hydraulic Fold Down	Hydraulic Fold Down	Hydraulic Fold Down

LX = Large Excavator **SAL** = Small Articulated Loader **SSL** = Skid-Steer Loader **TC** = Toolcat Utility Work Machine **TL** = Telehandler **UTV** = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



BACKHOE – LOADERS

Handle full-time excavating jobs with a Bobcat loader.

- Operates with minimal ground disturbance
- You can use the same buckets available for excavators
- Clear line of sight from the operator's seat
- Bob-Tach mounting system makes it fast and simple to mount the backhoe to the machine

Approved machines: **CTL** (M-SERIES), **SSL** (M-SERIES)

	7BH	9BH	8811
Operating Weight	1298 lb.	1487 lb.	2012 lb.
Max. Reach	123.6 in.	145.3 in.	166 in.
Dig Force – Bucket	5294 lbf.	5318 lbf.	8611 lbf.
Bucket Pin-On/X-Change	X-Change	X-Change	X-Change
Max. Dig Depth	95.1 in.	116.6 in.	135.7 in.
Stabilizer Type	Hydraulic Vertical	Hydraulic Vertical	Hydraulic Fold Down



BALE FORK

Move and load round, uneven or square bales.

- Bale fork length: 40.8 inches
- Two small-diameter forks penetrate the material
- Mounts to standard or heavy-duty pallet fork attachment frame

Approved machines: **CT** **CTL** **SSL** **TC** **TL**



BOB-TACH BACKHOE

Mount directly to the loader.
No kit or stabilizers required.

- Standard bolt-on X-Change system
- 13-, 16- and 20-inch bucket widths

Approved machines: **CTL** **SSL**

Bob-Tach Mounted Backhoe	
Operating Weight	750 lb.
Max. Dig Depth	72 in.
Max. Reach	77 in.
Swing Angle (Right or Left)	48°



BORING UNIT

Bore without tearing up paved areas.

- Easily install underground cables and flexible pipes
- Bore up to 2 feet deep and 30 feet horizontally
- Install cable or pipe up to 4 inches in diameter
- Side-shift allows operation next to buildings and other obstacles

Approved machines: MTL SAL SSL

	Boring Unit
Operating Weight	130 lb.
Width	36 in.



BOX BLADE – COMPACT TRACTOR

Impressive leveling, backfilling and grading.

- Heavy-duty, rear-mount cutting edges are strong enough to cut into gravel, topsoil or other material
- Adjustable and replaceable ripper shanks break up hard ground or compacted soil for easier moving
- Steel cutting blade edges are reversible and replaceable to increase the life of your implement

Approved machines: CT

	48 in.	60 in.	72 in.
Operating Weight	360 lb.	418 lb.	474 lb.
Length	28 in.	31 in.	31 in.
Width	49.5 in.	61.5 in.	73.5 in.



Pictured: Heavy-Duty Box Blade

BOX BLADE – LOADERS

Excel at standard and rough grading projects.

- Available in three models: standard, laser-controlled and heavy-duty
- The attachment's large box and oscillating bolster helps to move more dirt and material on every pass
- HD box blade capable of moving material in either forward or reverse for greater efficiency
- Foam-filled tires eliminate flats
- HD box blade compatible with Trimble® 3D grading systems
- Trimble and TopCon laser receivers offer ± 0.25 -inch accuracy

Approved machines: CTL SSL TC

	Box Blade	HD Box Blade
Operating Weight	980 lb.	1384 lb.
Length	64.3 in.	64.3 in.
Box Blade Moldboard Width (Cutting Width)	84 in.	84 in.



LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



BREAKER, HYDRAULIC

Break concrete faster. Cut through rocks easier.

- Matches hydraulic capacity of the carrier to the breaker for consistent machine-to-breaker performance
- Quieter, smoother operation while maintaining blows per minute
- Automatically regulates pressure regardless of changes in outdoor temperature

Approved machines: CTL MTL MX SAL SSL

	HB680	HB880	HB980	HB1180	HB1380	HB2380
Operating Weight (Without Mounting Frame)	281 lb.	427 lb.	502 lb.	659 lb.	849 lb.	903 lb.
Blows Per Minute (at Max. Flow)	1340	1310	1450	1280	1230	910
Flow Range	7-13 gpm	8-17 gpm	12-21 gpm	15-26 gpm	17-32 gpm	20-33 gpm
Impact Energy Class	150 ft.-lb. (200 J)	300 ft.-lb. (407 J)	500 ft.-lb. (650 J)	750 ft.-lb. (1016 J)	850 ft.-lb. (1152 J)	1000 ft.-lb. (1356 J)
Recommended Working Thickness	2-4 in.	4-10 in.	6-14 in.	8-16 in.	10-18 in.	12-20 in.



BREAKER, NITROGEN

Smash that deadline. Protect that uptime.

- Offers a long piston stroke to maximize impact energy and reduce recoil
- Unique valve design reduces pressure fluctuations and strain on carrier hydraulic pumps
- Only two moving parts, and all grease points are within easy reach

Approved machines: CTL MTL MX SAL SSL

	NB110	NB140	NB150	NB160	NB170	NB180	NB240	NB260
Operating Weight	185 lb.	508 lb.	737 lb.	1002 lb.	1207 lb.	1344 lb.	2242 lb.	2956 lb.
Blows Per Minute	1300	1022	1075	979	965	1000	850	750
Blows Per Minute Flow	7.9 gpm	13.2 gpm	20.4 gpm	23.3 gpm	21.9 gpm	29 gpm	37 gpm	44.9 gpm
Impact Energy Class	150 ft.-lb.	350 ft.-lb.	550 ft.-lb.	900 ft.-lb.	1200 ft.-lb.	1500 ft.-lb.	1714 ft.-lb.	1844 ft.-lb.



NEW PRODUCT



BRUSH GRAPPLE – COMPACT TRACTOR

Grab bundles of branches, downed trees and other material.

- Large grapple capacity carries more material each cycle
- Easy-to-reach grease points ensure easy maintenance
- Quickly and easily connects to your front-end loader
- Clean hose routing protects components from jobsite hazards

Approved machines: CT

	GR48	GR60
Operating Weight	205 lb.	415 lb.
Overall Width	49 in.	61 in.
Overall Height Closed	32.75 in.	42 in.
Grapple Opening	33 in.	27 in.

AT = Articulating Tractor CT = Compact Tractor CTL = Compact Track Loader CWL = Compact Wheel Loader MTL = Mini Track Loader MX = Excavator



BRUSHCAT ROTARY CUTTER

Cut smoothly on uneven terrain.

- Short deck design reduces weight, increases visibility and allows tighter turning
- Self-adjusting, pivoting flotation linkage minimizes the effect of uneven ground and increases first-pass accuracy
- The high cutting speeds and heavy-duty blades maximize inertia to cut and mulch dense vegetation in one pass
- Dual offset motors provide a clean cut every time (66-80 in.)

Approved machines: **CTL** **MTL** **SAL** **SSL** **TC**

	44 in. (30cc)	54 in. (35cc)	54 in. (50cc)	66 in. Std. Flow	66 in. High Flow	72 in. Std. Flow	72 in. High Flow	80 in. High Flow
Operating Weight	931 lb.	1042 lb.	1042 lb.	1437 lb.	1437 lb.	1500 lb.	1500 lb.	1581 lb.
Overall Width	48 in.	58 in.	58 in.	70.3 in.	70.3 in.	76.3 in.	76.3 in.	84.3 in.
Blade Tip Speed (Max. Flow)	16,595 ft./min.	17,754 ft./min.	17,573 ft./min.	18,238 ft./min.	17,064 ft./min.	17,197 ft./min.	16,536 ft./min.	18,219 ft./min.
Flow Range	9-12.5 gpm	9-12.5 gpm	12-18 gpm	15-24 gpm	24-36 gpm	15-26 gpm	24-40 gpm	24-40 gpm
Cutting Height	3 in.	3 in.	3 in.	3 in.	3 in.	3 in.	3 in.	3 in.
Cutting Capacity Diameter	2 in.	2 in.	2 in.	3 in.	3 in.	3 in.	3 in.	3 in.



HD BRUSH CUTTER

Built to take on brush-clearing jobs, both big and small.

- Reversible cutting direction doubles blade life
- Front push bar keeps material at a distance while the three-blade rotary cutter cuts it down
- Reinforced deck and quick spin-down for increased protection
- High-efficiency hydraulic motors maximize carrier output

Approved machines: **CTL** **SSL**

	62 in. Std. Flow	62 in. High Flow	74 in. Std. Flow	74 in. High Flow	86 in. High Flow
Operating Weight	1950 lb.	1950 lb.	2150 lb.	2150 lb.	2450 lb.
Overall Width	68.9 in.	68.9 in.	80.9 in.	80.9 in.	92.9 in.
Flow Range	17-23 gpm	26-31 gpm	17-23 gpm	26-37 gpm	30-37 gpm
Blade Tip Speed (Max. Flow)	17,907 ft./min.	19,429 ft./min.	17,811 ft./min.	17,005 ft./min.	19,763 ft./min.
Cutting Capacity	10 in.	10 in.	10 in.	10 in.	10 in.



BRUSH SAW

Cut down brush and clear small trees.

- Flow range 15-23 gpm

Approved machines: **CTL** **SSL**

Brush Saw	
Operating Weight	590 lb.
Tip Speed at 22 gpm	3256 ft./min.
Degree of Angle (Right or Left)	12°
Cutting Wheel Diameter	28.5 in.

LX = Large Excavator **SAL** = Small Articulated Loader **SSL** = Skid-Steer Loader **TC** = Toolcat Utility Work Machine **TL** = Telehandler **UTV** = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.

THE BEST-BUILT BUCKETS IN THE INDUSTRY



Pictured: Heavy-Duty Bucket



**CONTACT YOUR DEALER OR HAVE BUCKETS
SHIPPED DIRECTLY TO YOU AT SHOP.BOBCAT.COM**

BUCKETS – LOADERS

- Standard-duty bucket for lighter-duty jobs
- Heavy-duty bucket for high breakout forces
- Severe-duty bucket for extreme applications
- Light material bucket for snow, mulch or fertilizer
- Combination bucket can be used as a bucket, grapple, dozer and for spreading material
- Rock bucket features gusseted tines and high-steel strength
- Utility bucket for small articulated loaders with see-through back
- Weld-on and bolt-on cutting edges available
- Industrial or general-purpose bucket for mini track loaders
- **NEW:** General-purpose bucket for articulating tractors

Approved machines: AT CTL CWL MTL SAL SSL TC TL



Pictured: Standard Clamp

BUCKET CLAMPS – EXCAVATORS

STANDARD

- Grab, lift, move and place materials
- Easily maneuver in tight spaces to selectively grab objects
- Hydraulically actuated
- Clamp is compatible with extendable arm
- Pair with a trenching bucket or three-tined grapple to move oddly shaped objects

PRO CLAMP SYSTEM

- Adjust the Pro Clamp™ configuration for the job at hand
- Grab large, small or irregular objects with greater grip
- Create a smooth trench bottom with the optional grading tool, avoiding the need for a second “smooth lip” bucket
- Clean up spoil piles quickly with the grading tool and reduce manual labor
- Remove the tool when trenching, giving you enhanced visibility into the trench area

Approved machines: MX

	E20 Class I	E26-E35 Class II	E42 Class III	E42-E63 Class IV	E85 Class VI
Operating Weight	50 lb.	126 lb.	171 lb.	218 lb.	449 lb.
Clamp Width	5.5 in.	13 in.	14.4 in.	15 in.	16.5 in.
Tooth Radius	19.8 in.	27.2 in.	27.2 in.	32 in.	41 in.
Tooth Thickness	0.5 in.	0.75 in.	0.75 in.	1 in.	1 in.

Pro Clamp With Material Clamp

	E32/E35	E42/E45/E50/E55
Operating Weight	189 lb.	295 lb.
Thickness	0.63 in.	1 in.
Number of Teeth	2	2
Teeth Width	13.4 in.	15.9 in.

Pro Clamp With Grading Tool

	E32/E35	E42/E45/E50/E55
Operating Weight	194 lb.	280 lb.
Thickness	0.63 in.	0.63 in.
Cutting Edge Width	24.25 in.	24.25 in.

AT = Articulating Tractor CT = Compact Tractor CTL = Compact Track Loader CWL = Compact Wheel Loader MTL = Mini Track Loader MX = Excavator



Pictured: Heavy-Duty Exchange Grading Bucket

HEAVY-DUTY

Add capacity to move material on a jobsite, or easily finish, grade, backfill or clean ditches.

This attachment can be pinned on, quick coupled or utilized with a thumb. We offer 60-inch grading buckets for both the E145 and E165.

Approved machines: LX MX



BUCKETS, GRADING – EXCAVATORS

STANDARD

Backfill, clean ditches and complete finish grading.

- Features replaceable and reversible cutting edge, increased capacity and no center gusset
- 31-, 36-, 39-, 48- and 60-inch widths
- From Class 0 through Class 6 (E10 – E88)
- Pair with Hydra-Tilt™ or PowerTilt® swing accessories

Approved machines: MX



Pictured: Heavy-Duty Exchange Trenching Bucket

LARGE EXCAVATOR

Makes light work of even the heaviest digging.

- Includes two triangular wear shrouds
- E145 available sizes: 24-, 36- and 42-inch
- E165 available sizes: 36-, 42- and 48-inch

Approved machines: LX

BUCKETS, TRENCHING – EXCAVATORS

HEAVY-DUTY

Dig trenches for water, power and telecommunications projects.

- Cast side cutter provides enhanced durability and functionality
- Weld-on shanks offer strength and durability
- X-Change reinforcement plate (18-inch bucket and up) for severe digging
- Class 0 to Class VI

Approved machines: MX

SEVERE-DUTY

For the most extreme operations.

- Class 5 and 6 buckets fitted with ESCO® ground engagement tools with wrap-around, weld-on shanks
- Class 3 and 4 trenching buckets are available with either ESCO teeth and shanks or our current ground engagement tools

Approved machines: MX


 **EXCLUSIVE**

BOB-DOCK ATTACHMENT MOUNTING SYSTEM

Change most hydraulic attachments without stepping outside the cab to remove or connect hoses.

Approved machines: CTL SSL



SEE IT IN ACTION.



CHIPPER

Avoid hauling debris. Chip on the spot.

- Ideal for tree pruning and removal, municipalities, parks and recreation, rentals, and personal property maintenance
- Reduces branch volume 10-to-1
- Remote attachment control safely starts and stops the machine and chipper from outside the loader
- Discharge chute rotates 360 degrees; includes adjustable deflector

Approved machines: CTL SSL TC

	5A	8B
Operating Weight	1145 lb.	1660 lb.
Continuous Chipping Size	Up to 3 in. diameter material	Up to 5 in. diameter material
Feeder Opening	5 in.	9.2 in.
Dual Mounting Locations	Front or right side of loader	Front or right side of loader
Flow Range	26-40 gpm	26-40 gpm



CONCRETE MIXER

Mix concrete wherever, whenever.

- Transports, mixes and dumps concrete faster
- Perfect for sidewalks, driveways, finish work, fence posts and footings
- Drum rotates in either direction for superior mixing
- Remote attachment control safely starts and stops the machine and concrete mixer from outside the loader

Approved machines: CTL SSL

Concrete Mixer	
Operating Weight	440 lb.
Rotation	Bi-rotational
Capacity	6.9 cu. ft.
Recommended Drum Speed	20 rpm
Flow for Recommended Drum Speed	11 gpm



CONCRETE PUMP

Easily pour concrete in difficult-to-reach areas.

- Standard-flow loaders place up to 18 cubic yards per hour
- High-flow loaders place up to 30 cubic yards per hour
- Dual mounting positions allow the hopper to be placed on the right or left side of the loader
- Start the pump without entering the loader with the remote control kit

Approved machines: CTL SSL

Concrete Pump

Operating Weight	2200 lb.
Max. Aggregate Size	1.5 in.
Max. Concrete Pressure	750 psi
Vertical Pumping Height	50 ft.
Horizontal Pumping Distance	250 ft.
Hopper Capacity	10 cu. ft.



DIGGER

Save time with powerful forward and reverse digging.

- Remove rocks and stumps
- Transplant trees and shrubs
- Prune roots, dig trenches or loosen hard-packed soil
- Open frame design for greater visibility from inside the cab
- Replace the shovel; save time and manual labor

Approved machines: CTL MTL SAL SSL

12S 25 in. 30 in. 36 in.

Operating Weight	200 lb.	290 lb.	307 lb.	325 lb.
Cutting Width of Digger	12 in.	25 in.	30 in.	36 in.
Dig Depth	28 in.	48 in.	48 in.	48 in.



NEW PRODUCT



DISC MULCHER*

Cut and mulch trees with impressive speed.

- Mulch trees and brush up to 6 inches in diameter
- Cut trees up to 14 inches in diameter
- Flywheel design maintains disc speed to slice material and mulch effectively

Approved machines: CTL SSL


*Forestry Applications Kit required

48DCM-G88 48DCM-G103 60DCM-G132 60DCM-P124

Overall Width	63.1 in.	63.1 in.	77.2 in.	77.2 in.
Operating Weight	1625 lb.	1625 lb.	2100 lb.	2115 lb.
Motor Package	5.4 cu. in.	6.3 cu. in.	8.1 cu. in.	7.65 cu. in.
Hydraulic Flow Range	23-29 gpm	30-37 gpm	32-45 gpm	32-45 gpm

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.

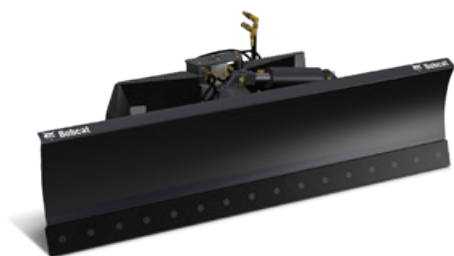

DOZER BLADE

Turn your machine into a mini dozer.

- Push large amounts of material quickly and easily
- Adjustable skid shoes provide depth control and forward and reverse grading
- Reversible cutting edge adds versatility and increases uptime
- 96-inch dozer blade model features all-cast design for maximum strength and productivity

Approved machines: CTL MTL SSL TC

	54 in.	80 in.	90 in.	96 in.
Operating Weight	310 lb.	950 lb.	987 lb.	1580 lb.
Working Width (Fully Angled)	46.8 in.	69.3 in.	78 in.	83.5 in.
Angle (Right or Left)	30°	30°	30°	30°
Oscillation	0°	8°	8°	10°



DRUM MULCHER – LOADERS*

Shred trees and overgrowth into mulch.

- Features high-strength, steel-body construction for leading durability and performance
- Select drum mulchers feature a depth control rotor for a more efficient bite into trees up to 8 inches in diameter
- Standard 2-speed hydraulic motor for increased drum torque and quicker drum speed recovery – single-speed option available
- Heavy-duty carbide teeth rip through hard and soft woods, providing long life and uptime protection
- Hydraulic drum brake brings drum rotation to a stop quickly after deactivating the auxiliary hydraulics
- Available in high-flow and super-flow configurations

Approved machines: CTL SSL

*Forestry Applications Kit required

	50 in. (2-speed)	50 in. (2-speed DCR)	61 in. (1-speed)	61 in. (2-speed)	61 in. (2-speed DCR)	72 in. (2-speed)
Operating Weight With Drum Option	2350 lb.	2514 lb.	2500 lb.	2525 lb.	2819 lb.	3140 lb.
Number of Teeth	24	20	30	30	24	36
Tree Diameter: Continuous Use	5 in.	5 in.	5 in.	5 in.	5 in.	5 in.
Tree Diameter: Intermittent Removal	9 in.	9 in.	9 in.	9 in.	9 in.	9 in.
Tree Diameter: Occasional Removal	12 in.	12 in.	12 in.	12 in.	12 in.	12 in.
Max. Hydraulic Flow	45 gpm	45 gpm	40 gpm	45 gpm	45 gpm	45 gpm
Max. Hydraulic Pressure	4000 psi	4000 psi	4000 psi	4000 psi	4000 psi	4000 psi

DCR = Depth Control Rings Drum

AT = Articulating Tractor CT = Compact Tractor CTL = Compact Track Loader CWL = Compact Wheel Loader MTL = Mini Track Loader MX = Excavator

NEW PRODUCT



DRUM MULCHER – COMPACT EXCAVATOR

Efficiently cut trees and brush up to 5 inches in diameter.

- Split ring rotor with bite control maximizes mulching efficiency
- Well-designed processing chamber reduces mulch size
- Easy serviceability with two grease ports, motor access cover and side cover

Approved machines: **MX**

	28DMX	36DMX	50DMX
Working Width	28.38 in.	36.13 in.	50.13 in.
Overall Width	39.44 in.	44.68 in.	58.68 in.
Hydraulic Flow Range	16-40 gpm	20-40 gpm	25-40 gpm
Weight*	750 lb.	850 lb.	1050 lb.

*Weight does not include hoses or mounting caps.



DROP HAMMER

Break and demolish concrete.

- Delivers more than 3,600 foot-pounds of impact energy combined with a fast cycle time of 20 blows per minute
- Fractures the material below the surface, leaving the surface free of jagged debris
- Generates little vibration or noise compared to standard hydraulic breakers, meaning less wear on the machine and less noise for operator and bystanders

Approved machines: **CTL** **SSL**



DUMPING HOPPER

Move material where dump trucks can't.

- Mounts easily onto Bobcat loaders for transportation to jobsites
- Can be loaded, parked, detached from power unit, filled, reattached and driven to dumpsite
- Large-capacity hopper empties quickly and easily
- Caster wheel design with flotation tires supports the dumping hopper on uneven terrain

Approved machines: **CTL** **SAL** **SSL** **TC**

	Model 10	Model 25
Operating Weight	665 lb.	1190 lb.
Capacity (Struck)	25.7 cu. ft.	67.5 cu. ft.
Capacity (Heaped)	29.7 cu. ft.	87.9 cu. ft.

LX = Large Excavator **SAL** = Small Articulated Loader **SSL** = Skid-Steer Loader **TC** = Toolcat Utility Work Machine **TL** = Telehandler **UTV** = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



FC200	
Operating Weight	1640 lb.
Cutting Width	78 in.
Cutting Height Range	1.5-3 in.

FLAIL CUTTER

Clear brush and small trees.

- Variable displacement motor matches attachment to carrier's capabilities
- Three cutting heights for a variety of terrains and brush types
- Produces fine mulching action and minimizes bunching of thick brush
- Thick steel deck design protects the attachment and provides maximum strength

Approved machines: **CTL** **SSL** **TC** **TL**

FC200	
Cutting Capacity	Brush material up to 3 in. diameter
Blade Tip Speed @ 2200 rpm	9000 ft./min.
Flow Range	17-40 gpm



NEW PRODUCT



FLAIL MOWER – ARTICULATING TRACTOR

Cut through tall, heavy grass and brush.

- Quick hitch attachment system for easy installation or removal in minutes without any tools
- Rubber guarding for debris retention
- Two different knife options to transition from rough cutting to finish cutting

Approved machines: **AT**

AT450 Flail Mower	
Operating Weight	490 lb.
Cutting Width	72 in.
Overall Width	78.7 in.
Height of Cut Range	1 in.-3 in. in 0.5 in. increments



FLAIL MOWER – EXCAVATOR

Cut down brush, grass, small trees and more.

- Triple-knife flails rip through hard and soft wood
- Includes chains to help contain debris
- Direct-drive hydraulic motor expertly balances torque and rpm
- Three models available for cab-equipped excavators only

Approved machines: **MX** (E32 – E88)

	30 in.	40 in.	40 in.
Operating Weight With X-Change Mount	649 lb.	736 lb.	881 lb.
Operating Weight With Pin-On Mount	–	708 lb.	876 lb.
Flow Range	12.2-19.5 gpm (46-74 L/min.)	14-22.4 gpm (53-85 L/min.)	18.4-31.7 gpm (70-120 L/min.)
Number of Knives	27	36	36
Max. Cutting Capacity	4 in.	4 in.	4 in.

AT = Articulating Tractor **CT** = Compact Tractor **CTL** = Compact Track Loader **CWL** = Compact Wheel Loader **MTL** = Mini Track Loader **MX** = Excavator



FRONT-END LOADER

Does the digging and hauling for you.

- Digging, moving dirt, loading and carrying material
- Easy to attach and remove
- Delivers leading lift capacity and height
- Five models available with standard bucket included
- FL6 (48 in.), FL7 (60 in.), FL8 (60 in.), FL9 (66 in.) and FL9-5 (72 in.)

Approved machines: **CT**



GRADER

Grade with consistent precision and control.

- Bolster oscillates to minimize the effect of uneven ground
- Proportional hydraulic valve offers precise blade control
- Automatic grade control options include 3D-Ready, Laser and Sonic/Slope Tracer
- Compatible with Trimble and TopCon laser receivers so you can achieve ± 0.25 -inch accuracy or better

Images are not to scale; grader is larger than other attachments pictured on this page.

Approved machines: **CTL** **SSL** **TC**

	84 in.	96 in.	108 in.
Operating Weight	1375 lb.	2788 lb.	2861 lb.
Length	94.5 in.	104 in.	104 in.
Blade Offset (Right or Left)	12 in.	13 in. (Hydraulic)	13 in. (Hydraulic)
Moldboard Angle (Right or Left)	25°	30°	30°
Width of Moldboard (Fully Angled)	76.1 in.	83.3 in.	93.7 in.
Max. Cut Depth	114 mm	188 mm	188 mm
Number of Cylinders	3	5	5



GRADING BLADE

Expertly grade no matter the terrain.

- Pair with Hydra-Tilt or PowerTilt swing accessories
- Excellent for backfilling trenches and leveling terrain
- Grade a wide variety of landscapes
- Shape drainage swales to minimize runoff or capture stormwater

Approved machines: **MX**

Grading Blade, X-Change	55 in.
Operating Weight	320 lb.
Width	55 in.
Height	14 in.

LX = Large Excavator **SAL** = Small Articulated Loader **SSL** = Skid-Steer Loader **TC** = Toolcat Utility Work Machine **TL** = Telehandler **UTV** = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



GRAPPLE, 3-TINED

Grab, pick and place bulky material with powerful bite.

- Three-tine design lifts and moves large and hard-to-manage materials
- Move brush, logs and landscaping stones
- Ideal for land clearing, landscaping, demolition, construction, and buildings and grounds maintenance

Approved machines: **MX**

	Class III	Class IV
Operating Weight	200 lb.	225 lb.
Width	20.5 in.	20.5 in.
Number of Grapple Tines	3	3
Mount	X-Change	X-Change



GRAPPLE, INDUSTRIAL

Get a grip on bulky material and oddly shaped objects.

- Dual cylinders on larger models offer a secure grip on uneven loads
- Removable hose guide offers easy hose routing when grapple is attached
- **A BOBCAT-EXCLUSIVE DESIGN:** Recently optimized for improved performance, the inertia-welded cylinder ends deliver strong, smooth operation through improved hydraulic cushioning at the end of the stroke
- Bobcat tines are backed by more steel and greater reinforcement

Approved machines: **CTL** **CWL** **MTL** **SAL** **SSL** **TC** **TL**

	Bucket							Fork		
	36 in.	48 in.	62 in.	68 in.	74 in.	80 in.	86 in.	66 in.	78 in.	86 in.
Operating Weight	365 lb.	448 lb.	884 lb.	922 lb.	960 lb.	1101 lb.	1302 lb.	937 lb.	1218 lb.	1293 lb.
Number of Fork Teeth (Factory)	–	–	–	–	–	–	–	7	8	9
Number of Fork Teeth (Possible)	–	–	–	–	–	–	–	13	15	17
Number of Grapple Tines	1	1	2	2	2	2	2	2	2	2



GRAPPLE, LOG

Lift and move logs, fallen trees and other heavy-duty material.

- Reinforced tines provide powerful and lasting grip on logs and brush
- Integrated tree pusher assists in felling branches, stems or trees in the intended direction
- Heavy-duty teeth help stabilize logs of all sizes during operation

Approved machines: **MTL** **SAL**

	56 in.
Operating Weight	335 lb.
Length	34.8 in.
Width	39.2 in.
Height	39 in.



GRAPPLE, ROOT

Rip through tough land-clearing jobs.

- Curved skeletal tooth design picks up material without driving teeth into the ground
- Dirt falls between teeth to minimize topsoil removal for lighter and fewer loads
- Fully enclosed mounting frame extends wear life by minimizing frame area flexing
- **A BOBCAT-EXCLUSIVE DESIGN:** Recently optimized for improved performance, the inertia-welded cylinder ends deliver strong, smooth operation through hydraulic cushioning at the end of the stroke
- Dual grapple action on larger models offers a secure grip on uneven loads

Approved machines: CTL MTL SAL SSL TC TL

	36 in.	48 in.	66 in.	72 in.	80 in.	86 in.
Operating Weight	316 lb.	395 lb.	999 lb.	1049 lb.	1164 lb.	1181 lb.
Number of Grapple Tines	1	1	2	2	2	2



GRAPPLE, UTILITY

Grab onto loose, hard-to-handle material.

- Add to a utility fork, general purpose bucket, low-profile bucket or construction/industrial bucket for more holding ability
- Curved teeth deliver efficient scooping capabilities for the loosest materials
- Forged teeth provide exceptional strength with low weight, increasing carrying capacity
- Quickly and easily add more teeth to efficiently handle smaller materials

Approved machines: CT CTL MTL SAL SSL TC

Grapple – Add to bucket/forks	32 in. GP	32 in. Utility	55 in. GP	55 in. Utility
Operating Weight	157 lb.	157 lb.	180 lb.	243 lb.
Number of Grapple Tines	3	3	4	4



HYDRATILT SWING ACCESSORY

Save time on grading with added accessory efficiency.

- Mounts between the excavator's bucket and the arm
- Angles the bucket 30 degrees to either side
- Work efficiently when creating slopes, cutting or cleaning drainage ditches, grading, and contouring with reduced repositioning

Approved machines: MX

Hydra-Tilt - MX	
Operating Weight	250 lb.
Side-to-Side Rotation	60°
Output Torque @3000 psi	3210 ft.-lb.

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



HYDRAULIC QUICK COUPLER

Change attachments from the security of the large excavator cab.

- Pin grabber style only releases in a curled position to ensure secure coupling
- No grease points for minimal maintenance

Approved machines:



NEW PRODUCT



HYDRAULIC TILT COUPLER

Save time and effort on the jobsite.

- Increases operator productivity
- Protected hose routing minimizes snags, damage and downtime
- No exposed cylinders or hydraulics for the ultimate in durability

Approved machines:

	TC08	TC14
Operating Weight	549 lb.	822 lb.
Side-to-Side Rotation	180°	134°



LANDPLANE

Simplify grading, leveling, aerating, pulverizing and transporting material.

- Use it moving forward for aggressive cutting and sod-peeling
- Travel in reverse for more controlled cutting and finishing work
- Easily loosen stubborn soils with the bi-directional scarifier
- Removable metal grate efficiently breaks clumps

Approved machines:

	48 in.	72 in.	78 in.
Operating Weight	390 lb.	680 lb.	700 lb.
Length	46.6 in.	51.5 in.	51.5 in.
Working Depth – Scarifier	3 in.	3.5 in.	3.5 in.

= Articulating Tractor

= Compact Tractor

= Compact Track Loader

= Compact Wheel Loader

= Mini Track Loader

= Excavator



LANDSCAPE RAKE


Get the perfect finish for your jobsite.

- Rake and collect surface debris while smoothing and leveling soil
- Picks up rocks 3/4 inches and larger and most 1/2-inch rocks
- When full, dump the debris for a completely clean finish
- Hardened teeth offer maximum uptime protection
- Side skis provide adjustable depth control

Approved machines: CTL SSL TC

	5B	6B
Operating Weight	1109 lb.	1237 lb.
Working Width	60 in.	72 in.
Number of Tooth Bars	12	12
Number of Teeth (Total)	384	456
Bucket Capacity	12.1 cu. ft.	14.3 cu. ft.

NEW PRODUCT

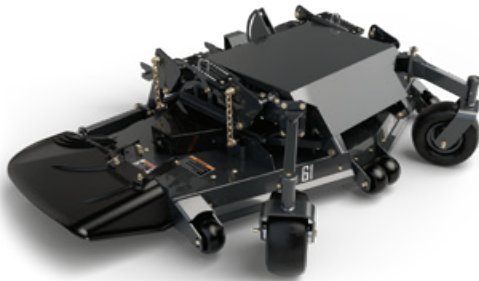

MOWER DECK, FINISH, AirFX

Get an unparalleled quality of cut with your AT450 articulating tractor.

- Powerful vacuum lifts grass for superior results
- Bolt-on baffle system enables swift replacement and ensures consistent and reliable performance
- Adjust and transport effortlessly with the hydraulic lift

Approved machines: AT

	61 in.	72 in.
Operating Weight	540 lb.	600 lb.
Cutting Width	61 in.	72 in.
Overall Width	76.5 in.	86.9 in.
Height of Cut Range	1 in.-5 in. in 0.5 in. increments	1 in.-5 in. in 0.5 in. increments



MOWER, FINISH

Professional results in less time.

- Rear discharge and solid rubber tires are standard
- Three cutting blades
- 1.5- to 4.5-inch cutting height
- Available in 60- and 72-inch cutting widths

Approved machines: CT



MOWER – LOADERS

Deliver consistently close, clean cuts.

- Oscillation allows the deck to float, providing a clean cut – even on uneven terrain
- Front-mounted mower eliminates flattened grass before the cut
- Anti-scalping wheel protects blades and mower deck for a longer blade life and consistent cutting height

Approved machines: CTL SSL TC

	72 in.	90 in.
Operating Weight	880 lb.	990 lb.
Cutting Height Range	2 in.-5.5 in. in 0.5 in. increments	2 in.-5.5 in. in 0.5 in. increments
Number of Blades	3	3
Flow Range	15-22 gpm	15-22 gpm
Tip Speed @ 22 gpm	16,502 ft./min.	16,172 ft./min.



MOWER, MID-MOUNT

Turn your compact tractor into a mowing powerhouse.

- Rugged, convenient drive-over deck for easy installation and removal
- Three blades travel at high speeds for a clean, smooth cut without skips
- Standard side discharge and solid rubber tires
- 1- to 4-inch height adjustment

Approved machines: CT

	60 in.
Operating Weight	375 lb.
Overall Width	74.1 in.
Blade Tip Speed	256 ft./s
Drive System	PTO



NEW PRODUCT



MOWER, ROUGH CUT

Evenly mow tall grass and thick, woody overgrowth.

- Quickly cuts through tall grass and challenging vegetation
- 72-inch working width allows you to power through fields, farmland and wooded areas with remarkable ease
- Effortlessly mow down woody overgrowth up to 1.5 inches in diameter

Approved machines: AT

	Rough Cut Mower
Operating Weight	515 lb.
Cutting Width	72 in.
Overall Width	76 in.
Cutting Capacity Diameter	1.5 in.



PACKER WHEEL

Compact trenches without auxiliary hydraulics.

- Open-rim sheep-foot design compacts the soil from the bottom up
- Equipped with X-Change mounting system for use with excavators
- Approved for use with backhoe attachments for certain loader models

Approved machines: CTL MX SSL

Packer Wheel	
Operating Weight	386 lb.
Width	11 in.
Wheel Assembly	2
Wheel Diameter	30 in.
Sheepfoot (Hollow Tube)	18 (9 per wheel)



PALLET FORK

Save time lifting, carrying and moving materials.

- Integrated, walk-through frame provides easier entry and exit
- Pallet fork meets ISO 2330:2002 standards for yield and fatigue tests
- Teeth available in 42- and 48-inch lengths; bale forks available in 40.8-inch length
- Hydraulic fork positions tines without the need to leave the cab, saving time and effort

Approved machines: CT CTL CWL SAL SSL TC TL

	MT Frame	48 in. Hydraulic	4K Heavy-Duty Frame	5.5K Severe-Duty Frame	CWL Frame
Operating Weight	252 lb.	565 lb.	337 lb.	467 lb.	238 lb.
Frame Weight	105 lb.	267 lb.	153 lb.	229 lb.	–
Fork Width	4 in.	4 in.	4 in.	4 in.	–
Number of Teeth	2	2	2	2	–

	TL – 48 in. Floating Pin Carriage	TL – 44 in. Wide Floating	TL – 56 in. Wide Floating	TL w/Back	TL w/Back & Sideshift
Operating Weight	–	933 lb.	683 lb.	717 lb.	893 lb.
Frame Weight	492 lb.	617 lb.	683 lb.	717 lb.	893 lb.
Fork Width	5 in.	4 in.	4 in.	4 in.	4 in.
Number of Teeth	2	2	2	2	2

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



PLANER

Efficiently cut and mill concrete or asphalt.

- Ideal for street repairs, matching uneven pavement surfaces, cutting drainage in parking lots and cleaning up around larger milling machines
- Multiple drum types and sizes are available for most planers
- High-flow planers increase hydraulic horsepower for higher production
- Standard hydraulic side lifts get you closer to curbs and walls
- Available in standard, high-flow and super-flow configurations

Approved machines: **CTL** **SSL**

	14 in. Std. Flow	18 in. High Flow	24 in. High Flow	40 in. High Flow	24 in. Super Flow	48 in. Super Flow
Operating Weight	1107 lb.	1191 lb.	1254 lb.	2300 lb.	2204 lb.	2660 lb.
Max. Cutting Depth	6 in.	6 in.	6 in.	5 in.	6 in.	5 in.
Sideshift	29.8 in.	29.8 in.	29.8 in.	25.6 in.	25.6 in.	24 in.
Max. Cutting Angle	7°	7°	7°	8°	8°	8°
Flow Range	15-27 gpm	22-40 gpm	22-40 gpm	29-50 gpm	29-50 gpm	29-50 gpm



PLATE COMPACTOR

Compact trenches without leaving the cab.

- Eliminates the need for a worker in the trench
- Easily pack material in hard-to-reach areas
- Shock mounts distribute vibrations for level and efficient compacting

Approved machines: **MX**

	PCF34	PCF64
Operating Weight	478 lb.	856 lb.
Dynamic Force	3400 lb.	6400 lb.
Frequency	2100 vpm	2000 vpm
Flow Range	12-28 gpm	12-28 gpm



NEW PRODUCT



POWER ANGLE BLADE

Power through dirt, gravel or snow.

- Ruggedly built hydraulic cutting blade and reversible cutting edge
- Equipped with trip protection to reduce hang-ups when plowing
- Locking pin prevents folding back when dozing

Approved machines: **AT**

	Power Angle Blade
Operating Weight	195 lb.
Length	32 in.
Height	19 in.
Hydraulic Angling (Right or Left)	30°



POWERTILT SWING ACCESSORY

Expertly dig under and around objects.

- Tilt the bucket instead of moving the entire excavator
- Offers up to 90 degrees of tilting motion to either side
- X-Change mounting system makes easy work of attaching and detaching the PowerTilt swing accessory

PowerTilt® is a registered trademark of the Helac Corporation.

Approved machines: **MX**

	PTX3	PTX4
Operating Weight	170 lb.	285 lb.
Side-to-Side Rotation	178°	180°
Output Torque @3000 psi	2100 ft.-lb.	3250 ft.-lb.



QUICK HITCH

Connect implements in seconds.

- Saves time and makes 3-point implement hookup easier
- Back up your tractor, lift up your quick-hitch-compatible implement and secure the top levers

Approved machines: **CT**



REAR BALLAST BOX

Maximize lifting capacities.

- Easily removed when you plan to use other implements
- Compact size enables convenient storage when not in use

Approved machines: **CT**



REAR STABILIZER

More force to power through any dig.

- Frame-mounted at the rear of the loader
- Transfers the weight of the loader to the attachment, providing more force
- Street pads protect sensitive surfaces from damage
- Grouser bars prevent loader from being pulled toward the work area

Approved machines: **CTL** **SSL**

LX = Large Excavator **SAL** = Small Articulated Loader **SSL** = Skid-Steer Loader **TC** = Toolcat Utility Work Machine **TL** = Telehandler **UTV** = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



RIPPER

Effortlessly tear through soil and frozen ground.

- Gussets provide substantial ripping power
- Heavy-duty shank reinforces structure for maximum durability
- Replaceable single-point tooth designed for optimum penetration

Approved machines: **MX**

	X-Change	Pin-On
Operating Weight	255 lb.	255 lb.
Tooth Radius	36 in.	36 in.
Shank Thickness	1.5 in.	1.5 in.



ROCK BUCKET

Collect rocks and debris while leaving soil behind.

- Tines are interconnected for additional strength
- All components are made of high steel strength for durability
- Operates above ground to remove surface vegetation
- Operates below ground to remove submerged objects

Approved machines: **CT CTL CWL SSL TC TL**

	62 in.	68 in.	74 in.	82 in.
Operating Weight	558 lb.	605 lb.	652 lb.	700 lb.
Number of Tines	17	19	21	23
Tine Thickness	0.4 in.	0.4 in.	0.4 in.	0.4 in.



ROTARY CUTTER, 3-POINT

Clear pastures, ditches and overgrown paths.

- Ideal for clearing undeveloped property, trails and ditches
- 1.5- to 9-inch adjustable cutting height
- Available in 48-, 60- and 72-inch cutting widths

Approved machines: **CT TC UTV**




SCARIFIER

Dig hard-packed soil and rip up asphalt.

- Mounted on the front of the loader
- Operates when loader is in reverse
- Manual lock holds teeth in position for steady results
- Set the digging depth with adjustable depth skis

Approved machines: CTL SSL

	Front Mount
Operating Weight	350 lb.
Width	60 in.
Max. Dig Depth	6 in.
Number of Teeth	5

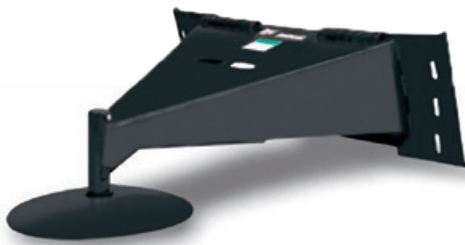

SCRAPER

Eliminate packed-on or built-up materials.

- Easily break packed materials to leave a smooth surface
- Remove mud, snow, ice and even carpet and floor tiles
- Self-sharpening cutting edge easily peels beneath material for removal

Approved machines: CTL SSL TC TL

	Scraper
Operating Weight	172 lb.
Length	55 in.
Disk Diameter	22 in.



SEEDER

Precisely place seed at the perfect depth and spacing.

- Covers over 2 acres per hour
- Ground-driven unit seeds directly into soil for better germination and precise coverage
- Front roller firms ground, presses small rocks beneath the surface and plants the seed into the seedbed
- Second roller gently forms soil around seed for optimum seed-to-soil contact

Approved machines: CT CTL SSL TC

	72 in.
Operating Weight (Empty)	1300 lb.
Operating Weight (Full)	1425 lb.
Overall Width	88 in.
Working Width	72 in.
Hopper Capacity	4 bushel

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



SILT FENCE INSTALLER

Place and secure silt fence at an astonishing rate.

- Covers thousands of feet per hour
- Optional side-shift helps you maneuver close to obstacles

Approved machines: **CTL** **SSL**

	Loader or 3-pt.
Operating Weight	775 lb.
Length	72.8 in.
Width	45.5 in.
Height	70 in.



SNOW BLADE

Unrivalled speed for light and moderate snow removal.

- Optional end wing kit converts some models into a snow pusher
- Heavy-duty snow blade offers 5 degrees of oscillation left or right for cutting-edge maneuverability

Approved machines: **CT** **CTL** **CWL** **MTL** **SAL** **SSL** **TC** **TL**

	54 in.	60 in.	72 in.	84 in.	96 in.	86 in. Heavy-Duty	96 in. Heavy-Duty	108 in. Heavy-Duty
Operating Weight	310 lb.	580 lb.	590 lb.	620 lb.	660 lb.	809 lb.	867 lb.	948 lb.
Degree of Angle (Right or Left)	30°	30°	30°	30°	30°	30°	30°	30°
Working Width (Fully Angled)	46.8 in.	52 in.	63 in.	73 in.	83 in.	75 in.	83 in.	93 in.
Cutting Edge (Steel)	0.38 x 4 in.	0.38 x 6 in.	0.38 x 6 in.	0.38 x 6 in.	0.38 x 6 in.	0.5 x 6 in.	0.5 x 6 in.	0.5 x 6 in.
Optional Rubber Cutting Edge	1 x 5 in.	1 x 6 in.	1 x 6 in.	1 x 6 in.	1 x 6 in.	1 x 6 in.	1 x 6 in.	1 x 6 in.




SNOW V-BLADE

Clear deep drifts of snow without leaving the cab.

- Scoop blade collects and holds snow for transportation
- V-blade quickly cuts initial pathways through deep, heavy or hard-packed snow
- Angle blade quickly and easily moves snow left or right
- Straight blade gives maximum width for piling snow and cleaning light snow cover
- **NEW:** Also available for articulating tractor

Approved machines: **AT** **CTL** **SAL** **SSL** **TC** **TL**

	60 in.	72 in.	84 in.	96 in.	108 in.	AT450 
Operating Weight	660 lb.	738 lb.	779 lb.	824 lb.	868 lb.	248 lb.
Working Width – Straight Blade	62 in.	74 in.	86 in.	98 in.	110 in.	58 in.
Working Width – V-Blade	54 in.	64.5 in.	75 in.	85.5 in.	96 in.	53 in.
Working Width – Scoop Blade	53 in.	63 in.	74 in.	84 in.	95 in.	49 in.
Working Width – Angled Blade	54 in.	64 in.	75 in.	85 in.	95 in.	58 in.

AT = Articulating Tractor **CT** = Compact Tractor **CTL** = Compact Track Loader **CWL** = Compact Wheel Loader **MTL** = Mini Track Loader **MX** = Excavator



NEW PRODUCT



Pictured: Heavy-Duty V-Blade

HEAVY-DUTY STRAIGHT BLADE

Plow through deep drifts to clear snow from sidewalks, walkways, driveways and more.

- Easy to install and remove
- Hand-held controller easily raises, lowers and angles blade
- 350 pounds of down pressure provides superior backdragging performance
- Direct lift eliminates bouncing during travel

Approved machines: UTV

SNOW BLADES – UTILITY VEHICLE

HEAVY-DUTY V-BLADE

Handle a wide variety of snow removal needs with five adjustable configurations.

- In the straight-blade position, operators can clear a swath of snow 72 inches wide
- In the V position, operators can choose between a wide setting (66 inches) and a narrow setting (60 inches)
- Double-acting angle cylinders allow for easy, independent wing adjustment
- Direct lift eliminates bouncing during travel

Approved machines: UTV

MID-DUTY STRAIGHT BLADE

Get cost-effective and productive plowing performance.

- Easy to install and remove
- Lighter-weight option that consumes minimal power and excels at light snow clearing
- Sway frame keeps the blade centered for easy maneuverability and great results
- Direct lift eliminates bouncing during travel

Approved machines: UTV



SNOWBLOWER, 3-POINT – COMPACT TRACTOR

Powerful, productive and easy to operate.

- Perfect for clearing driveways, sidewalks or parking lots
- Manual chute rotator standard
- Hydraulic chute rotator optional for tractors
- Available in 50-, 60-, 66- and 74-inch widths

Approved machines: CT



NEW PRODUCT



SNOWBLOWER – ARTICULATING TRACTOR

Clear a 48-inch path in deep snow with this commercial-grade attachment.

- Opening size of 27 inches by 48 inches allows for quick and effective snow removal
- Serrated auger, 16 inches in diameter, delivers superior performance with its open center design
- Achieve precise snow discharge control with the 7-inch diameter chute and 223 degrees of rotation
- Easily adjust the height of cutting edge with the adjustable skid shoes

Approved machines: AT

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



SNOWBLOWER, FRONT-MOUNT – COMPACT TRACTOR

Powerful, productive and easy to operate.

- Perfect for clearing driveways, sidewalks or parking lots
- Hydraulic chute rotator standard

Approved machines: **CT**

	48 in.	62 in.	72 in.
Operating Weight	353 lb.	385 lb.	620 lb.
Overall Width	51.4 in.	64.4 in.	74.4 in.



SNOWBLOWER – LOADERS

Throw and blow snow to clear a path.

- Increased intake height and bigger auger draw in more snow
- The rounded intake provides a smoother surface to roll the snow into the feed impeller rather than pushing it, minimizing clogging and improving snow flow
- Aggressive auger teeth – painted orange for improved visibility – easily break up and tear through packed snow and ice chunks
- Direct-drive sprocket rotation improves the performance, durability and ease of maintenance of the snowblower chute
- A reversible and replaceable cutting edge bites into hard ice and packed snow, and is designed for long life
- Visibility slots to see the cutting edge
- Adjustable full-length skid shoes to enhance ground contact
- Available in standard, high-flow and super-flow configurations

Approved machines: **CTL** **MTL** **SAL** **SSL** **TC**

	SB26x36	SB26x48	SB26x56	SB32x60	SB32x68
Operating Weight	620 lb.	672 lb.	700 lb.	920 lb.	941 lb.
Intake Height	26.5 in.	26.5 in.	26.5 in.	33 in.	33 in.
Discharge Chute Angle	270°	270°	270°	270°	270°
Throw Distance	Up to 25 ft.	Up to 25 ft.	Up to 25 ft.	Up to 40 ft.	Up to 40 ft.
Flow Required	8-17 gpm	8-17 gpm	8-17 gpm	13-31 gpm	13-31 gpm

	SB32x74	SB32x80	SB32x86	SB36x86	SB36x96
Operating Weight	981 lb.	1016 lb.	1041 lb.	1396 lb.	1457 lb.
Intake Height	33 in.	33 in.	33 in.	37 in.	37 in.
Discharge Chute Angle	270°	270°	270°	270°	270°
Throw Distance	Up to 40 ft.	Up to 40 ft.	Up to 40 ft.	Up to 40 ft.	Up to 40 ft.
Flow Required	13-31 gpm	13-31 gpm	13-31 gpm	36-45 gpm	36-45 gpm



SNOW PUSHER

Achieve maximum snow removal speed and efficiency.

- Easily and efficiently clear big winter jobsites
- Cover larger areas without frequent stops
- Accomplish efficient snow removal on decorative or sensitive surfaces
- Moldboard flotation and oscillation keep snow pusher in contact with the ground without damaging equipment or property

Approved machines: **CTL** **CWL** **SSL** **TC** **TL**

	8 ft.	10 ft.
Operating Weight	1122 lb.	1256 lb.
Width	102 in.	128 in.
Skid Shoes	0.75 x 5 in. AR400	0.75 x 5 in. AR400
Vertical Float	2.3 in.	2.3 in.
Tilt	12°	12°
Oscillation	+/- 4.5°	+/- 4.5°



SNOW PUSHER PRO

Built for the efficiency of a commercial snow remover.

- This attachment is an angle snow blade and snow pusher all in one
- Compatible with the following compact loader models: S740, S770, S850, T595, T650, T740, T770, T870 and the T550
- Optional 200-pound loader counterweight sold separately

Approved machines: **CTL** **CWL** **SAL** **SSL** **TC** **TL**

	Pro – 6 ft.	Pro – 8 ft.	Pro – 9 ft.	Pro – 10 ft.
Operating Weight	1272 lb.	1473 lb.	1529 lb.	1589 lb.
Width	80 in.	104 in.	116 in.	120 in.
Skid Shoes	36 in. x 9.75 x 1.5 poly	36 in. x 9.75 x 1.5 poly	36 in. x 9.75 x 1.5 poly	36 in. x 9.75 x 1.5 poly
Vertical Float	0 in.	0 in.	0 in.	0 in.
Tilt	35°	35°	35°	35°
Oscillation	+/- 6.0°	+/- 6.0°	+/- 6.0°	+/- 6.0°



SOD LAYER

Create smooth, green landscapes.

- Make quick and easy work of laying fresh, green sod
- Carry and lay a roll of sod up to 4 feet wide
- Front-mounted maneuverability offers effective performance even on smaller jobsites

Approved machines: **CTL** **SSL** **TC**

Sod Layer	
Operating Weight	596 lb.
Width	73 in.
Sod Roll Widths	24-48 in.

LX = Large Excavator **SAL** = Small Articulated Loader **SSL** = Skid-Steer Loader **TC** = Toolcat Utility Work Machine **TL** = Telehandler **UTV** = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



SAS 200	
Operating Weight	1488 lb.
Length	64.7 in.
Width	79.1 in.

SOIL AND ASPHALT SPREADER

Spread soil, asphalt and other loose materials.

- Fill trenches, lay sub-base materials, and widen and repair roads or sidewalks
- Hydraulic side wings are easily adjusted for any spread path from 5 inches to 6 feet
- Adjustable blade leaves layer materials up to 4 inches above ground level
- Hydraulic offset can shift the material guide up to 6 feet to the operator's right
- Transverse tilt up to 5 degrees can compensate for slope
- Optional auxiliary control panel is available
- Optional fixed, side-wing kit is available for curb and gutter applications

Approved machines: **CTL** **SSL**



SOIL CONDITIONER

Lay a good foundation for growth.

- Rocks and other debris are windrowed to the edge of the jobsite for easy cleanup and removal
- Replaceable carbide-tipped teeth offer maximum ground penetration
- Oscillating bolster on 72- and 84-inch models
- Front bolster offers better grade control and adjusts to create more room for transportation or storage
- Standard and high-flow models available

Approved machines: **CTL** **MTL** **SAL** **SSL** **TC** **TL**

	Manual 48 in.	Manual/Hydraulic 72 in.	High Flow 72 in.	Hydraulic 84 in.	High Flow 84 in.
Operating Weight	636 lb.	1110 lb.	1110 lb.	1268 lb.	1268 lb.
Overall Width	60.6 in.	86.2 in.	86.2 in.	98.2 in.	98.2 in.
Degree of Angle (Right or Left)	25°	25°	25°	25°	25°
Width (Fully Angled)	46 in.	65 in.	65 in.	76 in.	76 in.
Number of Teeth	81	121	121	141	141
Flow Range	10-18 gpm	13-37 gpm	25-37 gpm	18-37 gpm	30-37 gpm

SPREADER – LOADERS

No matter the season, the spreader has it covered.

- Maintain surfaces during winter, or spread seed and fertilizer during spring and summer
- HS8 spreader offers three material flow gates that spread 18-28 feet

Approved machines: **CTL** **SSL** **TC**



HS8 Spreader	
Operating Weight	387 lb.
Hopper Capacity	9.6 cu. ft.
Spreading Pattern	18-28 ft.
Speed Control	Variable, Hydraulic
Motor	Hydraulic
Spinner Wheel	18 in. diameter

AT = Articulating Tractor **CT** = Compact Tractor **CTL** = Compact Track Loader **CWL** = Compact Wheel Loader **MTL** = Mini Track Loader **MX** = Excavator



SPREADER, BOX

Use with your UTV or Toolcat utility work machine.

- Optimized for efficient and cost-effective use of salt
- Also compatible with sand and salt mix, bagged rock salt, bulk salt, and dry free-flowing sand
- Accessories automatically integrate with the hopper control with no additional wiring
- Accessories include: spill guards, vibrator, LED work light, LED strobe light and tarp kit

Approved machines: TC UTV

	SP13 Sand and Salt Spreader	SP9 Sand and Salt Spreader
Operating Weight	212 lb.	192 lb.
Hopper Capacity	13.45 cu. ft.	9.45 cu. ft.
Spreading Pattern	n/a – 30 ft.	n/a – 30 ft.
Speed Control	Variable Speed Control Dial	Variable Speed Control Dial
Motor	12-Volt 1/2 hp	12-Volt 1/2 hp
Spinner Wheel	12 in. diameter	12 in. diameter
Compatible Carrier	Toolcat Utility Work Machines	Bobcat UTVs



STUMP GRINDER

Easily turn tree stumps into mulch.

- Operates off the carrier's auxiliary hydraulics, eliminating the need to maintain an engine while operating
- 90-degree angle mount offers increased visibility to the cutting area
- Rubber deflecting shields aid in wood chip retention
- Unique valve design reduces cutting wheel stalling while in the cut

Approved machines: CTL MTL SAL SSL TC

	SG 30	SG 60	SGX 60
Operating Weight	460 lb.	980 lb.	995 lb.
Number of Teeth	16	32	32
Flow Range	10-14 gpm	17-32 gpm	25-40 gpm
Max. Cutting Arc	90°	80°	80°
Grinder Reach at Ground Level	46.2 in.	74 in.	74 in.
Max. Cutting Depth	11 in.	15 in.	15 in.
Max. Cutting Height	11 in.	32 in.	32 in.
Tip Speed	3109-4691 ft./min.	4480-6330 ft./min.	3321-5511 ft./min.

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



SWEeper

Sweep, collect, and dump dirt and debris.

- Poly bristles sweep and deposit debris in the sweeper bucket
- Simply dump sweeper bucket when full; no need for multiple cleanup attachments
- Cut through materials with the replaceable and reversible bucket cutting edge
- Effectively operate in forward and reverse
- Carrier-mounted water kits and a self-contained, sweeper-mounted water kit available to aid in dust abatement

Approved machines: CTL MTL SAL SSL TC TL

	44 in.	54 in.	60 in.	72 in.	84 in.
Operating Weight	690 lb.	770 lb.	988 lb.	1104 lb.	1221 lb.
Overall Attachment Width	48.3 in.	58.3 in.	66.2 in.	78.2 in.	89.9 in.
Bucket Capacity	6.6 cu. ft.	8.2 cu. ft.	12 cu. ft.	14.4 cu. ft.	18.5 cu. ft.
Broom Diameter	24.0 in.	24.0 in.	26.0 in.	26.0 in.	26.0 in.
Broom RPM @ Hyd. Flow	185 @ 15 gpm	185 @ 15 gpm	215 @ 15 gpm	215 @ 15 gpm	215 @ 15 gpm
Flow Range	9.5-19 gpm	9.5-19 gpm	16-23 gpm	16-23 gpm	16-23 gpm



TILLER, 3-POINT – COMPACT TRACTOR

Easy and efficient soil preparation.

- Break ground, prepare soil for planting, amend soil or remove weeds between tree rows
- Forward or reverse rotation
- Adjustable skid shoes for various working depths up to 7 inches
- Available in 48-, 60- and 72-inch tilling widths

Approved machines: CT



TILLER – LOADERS

Tear through clumps and hardened materials.

- Bi-directional rotation allows top-cutting and under-cutting when operating in either direction
- Offset mounting enables tilling beside sidewalks, curbs and buildings, increasing jobsite capabilities
- Optional adjustable skid shoes deliver depth control at 2-, 4- or 6-inch depths
- Hardened, double-edge tines break through materials to loosen soil

Approved machines: CTL MTL SAL SSL TC TL

	40 in.	62 in.	76 in.
Operating Weight	475 lb.	660 lb.	749 lb.
Max. Working Depth	6 in.	6 in.	6 in.
Drive	Direct Drive	Direct Drive	Direct Drive
Number of Tines	24	36	44
Flow Range	9-18 gpm	17-40 gpm	17-40 gpm

AT = Articulating Tractor CT = Compact Tractor CTL = Compact Track Loader CWL = Compact Wheel Loader MTL = Mini Track Loader MX = Excavator



TILT-TATCH ACCESSORY

Get more work out of your Bobcat attachments.

- Dig drainage ditches, cut a level path on a hillside and more
- Connects as an interface between carrier and non-hydraulic attachments
- Controlled directly from operator's seat

Approved machines: CTL SSL TC

	Tilt-Tatch
Operating Weight	320 lb.
Oscillation	+/- 15°



TINE RAKE

Easily collects debris and levels soil.

- Can be angled or reversed
- High-carbon tines are individually replaceable for easy, low-cost maintenance
- Available in 60-, 72- and 84-inch widths

Approved machines: CT



TREE SPADE

Quickly and efficiently dig and transplant trees.

- Turn any loader into an efficient transplanting unit while cutting labor costs
- Adjustable legs allow digging in five different root-ball sizes with one tree spade
- Compact design offers operation in confined areas without damaging the landscape
- Open frame design provides excellent visibility to the base of the tree
- Cone blade configuration – 30 degree tower angle; popular when trees are removed, transported and placed in new location
- Modified blade configuration – 25 degree tower angle; allows tree spade to place the removed tree directly into a basket

Approved machines: CTL SSL

	32 in. Convertible Cone	32 in. Convertible Modified	36 in. Convertible Cone	36 in. Convertible Modified	44 in. Convertible Cone	44 in. Convertible Modified
Operating Weight	1590 lb.	1525 lb.	1640 lb.	1580 lb.	2150 lb.	2145 lb.
Length	83.3 in.	74.2 in.	87.5 in.	78.4 in.	85.1 in.	78.5 in.
Width	91.8 in.	76 in.	95.6 in.	79.8 in.	85.1 in.	77.7 in.
Height	64.2 in.	58.7 in.	64.2 in.	58.7 in.	64.2 in.	66.6 in.
Tree Diameter*	2-3.25 in.	2-3.25 in.	2-3.75 in.	2-3.75 in.	3-4.5 in.	3-4.5 in.
Max. Hydraulic Flow	25 gpm	25 gpm	25 gpm	25 gpm	25 gpm	25 gpm

*At 6 in. above base of tree

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



TRENCH COMPACTOR

Done digging? Finish the job.

- Compress the soil for a neatly packed trench
- Large, wheel-type compactor compresses soil in the trench
- Vibratory shaker box offers optimum compaction in any soil type

Approved machines: CTL SSL

Trench Compactor	
Operating Weight	1400 lb.
Working Depth	27 in.
Working Width – Standard Pad	4.5-6.75 in.
Working Width – Wide Pad	8-10.25 in.
Wheel Diameter	46.5 in.
Dynamic Force	7000 lb.
Vibrations/Min.	2200 @ 18 gpm



TRENCHER

Cut a trench fast – even in demanding conditions.

- Large-diameter auger moves material from the trench's side and limits soil from falling back in
- Grease cylinder for quick and easy chain tensioning
- Side-shift versatility allows you to dig close to jobsite obstacles

Approved machines: CTL MTL MX SAL SSL TC

	MX112	LT112	LT113	LT213	LT313	LT414	LT405
Operating Weight	570 lb.	613 lb.	638 lb.	725 lb.	955-980 lb.	1181-1218 lb.	1520 lb.
Max. Operating Pressure	3000 psi	3000 psi	3000 psi	3300 psi	3300 psi	3300 psi	3300 psi
Flow Range	13-20 gpm	9-15 gpm	9-15 gpm	11-18 gpm	15-24 gpm	26-40 gpm	26-40 gpm
Dig Depth	24 in.	24 in.	36 in.	36 in.	36-48 in.	50-62 in.	48 in.
Widths Available	4-8 in.	4-8 in.	4-8 in.	4-8 in.	4-12 in.	4-12 in.	4-12 in.



TRUSS BOOM

Extend your reach for lifting and placing trusses.

- Precise fingertip controls allow an operator to place trusses exactly where they are needed for accurate jobsite performance
- Bob-Tach attachment mounting system makes hooking up and disconnecting attachments quick, easy and secure

Approved machines: TL

12 ft.	
Operating Weight	558 lb.
Length	146 in.
Width	47.5 in.
Height	19.3 in.



NEW PRODUCT



TURBINE BLOWER

Turn up the horsepower for a quick cleanup.

- High-velocity airflow of 114 mph provides efficient and effective debris removal
- 360 degrees of adjustable discharge direction for precise airflow control and targeted debris placement

Approved machines: AT



UTILITY FORK

Handle bundled material, loose straw, manure and other hard-to-grab materials.

- Utility fork teeth are replaceable
- For added versatility, pair with the utility grapple

Approved machines: CT MTL SAL TC

	36 in.	54 in.	60 in.	66 in.	72 in.	80 in.
Operating Weight	200 lb.	280 lb.	304 lb.	330 lb.	356 lb.	388 lb.
Number of Teeth Shipped	5	7	8	9	10	11
Max. Number of Teeth	9	13	15	17	19	19



VIBRATORY PLOW

Work below the surface with minimal ground disturbance.

- Designed exclusively for MTL and SAL loaders
- Ideal for installing pipe and cable with minimal ground disturbance
- Achieve a knife-like slit that almost disappears as the machine drives over the cut
- Coulter wheel cuts sod ahead of the plow blade while the pressure foot holds down sod and protects surrounding areas

Approved machines: MTL SAL

	VP12
Operating Weight	520 lb.
Plow Depth	6-18 in.
Max. Chute Blade Wire Diameter	0.5 in.
Max. Pull Blade Pipe Diameter	1.5 in.
Flow Range	10-14 gpm

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.



VIBRATORY ROLLER

Achieve superior compacting action.

- Hard-pack the ground in forward and reverse
- Minimizes vibrations to reduce operator fatigue and achieve more comfortable working conditions
- Padded drum compacts heavy soil, clay and clay-based backfill
- Smooth drum compacts sand, pea rock, gravel and asphalt patching
- Free-drum oscillation keeps more of the drum in contact with uneven terrain

Approved machines: CTL MTL SSL TL

	48 in. Padded Drum	48 in. Smooth Drum	73 in. Padded Drum	73 in. Smooth Drum	80 in. Smooth Drum
Operating Weight	1778 lb.	1788 lb.	2189 lb.	2208 lb.	2320 lb.
Overall Width	60.5 in.	60.5 in.	79 in.	79 in.	86 in.
Covers Right Side Tires On	66 in. wide loaders	66 in. wide loaders	73 in. wide loaders	73 in. wide loaders	80 in. wide loaders
Drum Offset	9 in. to right	9 in. to right	Centered	Centered	Centered
Drum Oscillation	+/- 12°	+/- 12°	+/- 7.5°	+/- 7.5°	+/- 7.5°
Dynamic Force	10,519 lb. @ 17 gpm 14,244 lb. @ 20 gpm	10,519 lb. @ 17 gpm 14,244 lb. @ 20 gpm	9905 lb. @ 20 gpm 14,263 lb. @ 24 gpm	9905 lb. @ 20 gpm 14,263 lb. @ 24 gpm	9905 lb. @ 20 gpm 14,263 lb. @ 24 gpm
Frequency	2448 vpm @ 17 gpm 2879 vpm @ 20 gpm	2448 vpm @ 17 gpm 2879 vpm @ 20 gpm	2401 vpm @ 20 gpm 2882 vpm @ 24 gpm	2401 vpm @ 20 gpm 2882 vpm @ 24 gpm	2401 vpm @ 20 gpm 2882 vpm @ 24 gpm
Number of Pads	78	–	102	–	–



SEE IT IN ACTION.

WATER KIT

Dust abatement for dirt and debris.

- High-capacity tank volume minimizes refilling
- Control water pump operation with a switch inside the carrier cab
- Complements the angle broom, sweeper, planer and vibratory roller attachments
- 14-gallon tank capacity

Approved machines: CTL SSL

	Quick-Tach
Operating Weight	165 lb.
Operating Weight (Full)	474 lb.
Tank Capacity (Each Tank)	14 gal.
Max. Flow Rate per Nozzle	0.28 gpm
Max. Pump Capacity	1.1 gal./min.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.

AT = Articulating Tractor CT = Compact Tractor CTL = Compact Track Loader CWL = Compact Wheel Loader MTL = Mini Track Loader MX = Excavator



WHEEL SAW

Deliver consistent, uniform cutting.

- Smoothly cut through asphalt, concrete, frozen ground, wire mesh and more
- Hydraulic depth adjustment gauge delivers a consistent, uniform cut depth
- Hydraulic side-shift shifts the attachment flush with any nearby object for a close cut

Approved machines: CTL SSL

	WS18	WS24
Operating Weight	2249 lb.	2723 lb.
Trenching Depth	6-18 in.	8-24 in.
Hydraulic Side-Shift	25.6 in.	25.6 in.
Flow Range	25-40 gpm	25-40 gpm



ATTACHMENT EXTENDED WARRANTY

Available on most Bobcat attachments. See your dealer for details.



Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat®, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries.

©2023 Bobcat Company. All rights reserved. | BC-2024A (11/23)

LX = Large Excavator SAL = Small Articulated Loader SSL = Skid-Steer Loader TC = Toolcat Utility Work Machine TL = Telehandler UTV = Utility Vehicle

Scan the QR codes for additional specifications and metric conversions.