



Bobcat®

Compact Tractors

1000, 2000, 4000 & 5000 Platforms



***One Tough
Animal***®



YOUR SPIRIT IS TOO WILD FOR TAME EQUIPMENT.

THE LAND DEMANDS A DOER.

Restless souls thrive out here – provided you can keep up with every acre of your property. The simple life is busier than many people believe, and Bobcat® compact tractors are here to help.

With a lineup of 15 powerful compact tractors, Bobcat delivers performance, ease of use, versatility ... everything you need to make the most of your land. And it comes in a machine that's familiar, comfortable and durable enough to be worthy of the world's hardest-working brand.



CT5558

Bob

FL9-5

Machine: CT5558
Attachment: Bucket

SIZE CLASSES

Machine: CT2025
Attachment: Bucket
Implement: Box Blade



EMPOWERMENT AT ITS MOST POWERFUL

CHOOSE FROM FOUR SIZE CLASSES.

With legendary Bobcat performance funneled into multiple models across four platforms, it's easy to find the right one for your needs. From the nimble yet powerful 1000-2000 platforms all the way up to the heavy hitters in the 4000-5000 platforms, these workhorses all bring rugged performance and the ability to use an array of attachments and implements.



1000 PLATFORM SUB-COMPACT TRACTORS

2 MODELS, 21-25 HP

Bobcat sub-compact tractors bring excellent capabilities for a wide variety of light-duty tasks, such as mowing, grading or loader work. Their smaller size allows you to take your tractor's maneuverable horsepower inside and around barns, sheds and beyond.



2000 PLATFORM COMPACT TRACTORS

5 MODELS, 25-40 HP

These economical tractors don't skimp when it comes to horsepower. 2000 platform tractors are available with manual shift or hydrostatic transmissions. Manual is effective for traveling longer distances at a consistent speed. Hydrostatic allows fast and intuitive direction changes for loader work and maneuvering around buildings and trees. The 2000 platform open-cab models make it convenient to climb on and off the tractor as needed.

The 2500 tractor models deliver all the benefits of the other 2000 platform tractors, plus an independent PTO on the CT2025, CT2035 and CT2040 or live PTO on the CT2535 and CT2540 for more productivity with less fatigue. The 2500 models also include a deluxe cab for unbeatable comfort for working during hot summer days or frigid winters.



4000 PLATFORM TRACTORS

4 MODELS, 45-58 HP

These heavy-duty work companions deliver rugged power and work efficiency for mowing, clearing overgrown fields, grading driveways and private roads, or clearing snow – all in an economical package. The 4000 platform tractors have high horsepower, extra weight and your choice of two transmission types that provide work performance that's matched to your property. The open cab is appealing for operators who frequently get on and off the tractor.



5000 PLATFORM TRACTORS

4 MODELS, 45-58 HP

With added horsepower plus intuitive operation and ergonomic controls, these tractors are made to quickly finish tough groundskeeping tasks such as mowing, brush clearing and more. Extra machine weight allows these tractors to excel with ground-engaging implements such as discs, cultivators and plows. A factory-installed deluxe cab allows you to work in maximum comfort, whether it's blowing snow in cold winter weather or spending hours working in high heat and humidity. A premium 3-point hitch is a must-have for owners who want to use a variety of different implements to complete work around their property.

MATCH YOUR DRIVE TO DO MORE.

Bobcat compact tractors offer four different transmission types available on select models. Multiple models offer both a standard and optional transmission type.

MANUAL TRANSMISSIONS

MANUAL 9X3 SHIFT TRANSMISSION

This economical, reliable manual-shift transmission requires you to stop to change between nine forward gears and three reverse gears. It's the classic tractor transmission that many people remember from growing up on the farm. It works well for jobs that require a constant speed, such as mowing, tilling or spraying. It efficiently handles demanding PTO work.

MANUAL 8X8 SYNCHRO SHUTTLE TRANSMISSION

For shift-on-the-fly functionality that is the most similar to a stick-shift automobile, the 2-range synchro shuttle transmission allows you to clutch and shift across eight forward and eight rear speeds. It offers enhanced ease of use if you prefer a manual transmission, plus it delivers great performance when moving up and down fields or traveling longer distances in one direction. PTO-intensive tasks are no sweat for these powerful machines.



*Machine: CT4055
Attachment: Pallet Fork
Implement: Box Blade*

HYDROSTATIC TRANSMISSIONS

2-RANGE AND 3-RANGE HYDROSTATIC TRANSMISSION

The hydrostatic transmission (HST) provides maximum ease of use and fast, simple direction changes, making it extremely effective for frequent front-end loader work, mowing or maneuvering in wooded areas while clearing brush. A simple twin-pedal design enables quick and easy direction changes: One pedal moves you forward; the other moves you in reverse. Its ease of operation also makes it a good choice for novice drivers.

ELECTRONIC HYDROSTATIC TRANSMISSION

E-HST provides the simplicity and ease of direction change you get with HST along with electronic acceleration that enables near-effortless travel-pedal input to control your speed. It works similar to an automatic transmission in a car. It also includes true cruise control to keep you moving at a constant speed.

YOU'VE GOT A LOT TO DO. GET A LOT OF TRACTOR.



The more you do with your tractor, the more ideas you have for your property. Bobcat compact tractors prepare you for every possibility. These agile machines are strong enough for your biggest jobs, but small enough to work inside and around sheds, barns, animal enclosures and anywhere else the work takes you. The weight, wheelbase, length, tire options and overall engineering of Bobcat compact tractors ensure that each machine feels powerful and capable while being responsive to your control and comfortable to operate.

With models up to 58 hp, generous lifting ability, great ground clearance and a powerful 3-point hitch with power take-off (PTO), Bobcat compact tractors bring outstanding performance and value to your property.



Machine: CT2035
Attachment: Bucket
Implement: Box Blade

Machine: CT1021



POWERFUL 3-POINT HITCH LIFT CAPACITY

Count on excellent 3-point hitch lift capacities to increase your implement capabilities and improve your performance.

3-POINT HITCH AND REAR PTO

The 3-point hitch enables you to do a large number of tasks on your property using both drag-behind and PTO-powered implements. All Bobcat compact tractors include rear PTO as standard equipment.

DRAWBAR TOWING POWER

Bobcat compact tractors deliver leading drawbar towing power and force for heavy towing performance that beats many other tractor brands. An adjustable hitch provides towing flexibility and convenience.

STANDARD FOUR-WHEEL DRIVE

A hard-working tractor needs hard-working traction. All Bobcat compact tractors come with standard four-wheel drive so you can easily engage the system whenever the work demands it.

TIGHT TURNING RADIUS

Bobcat compact tractors feature a tight turning radius – as little as 8 feet, depending on the model – so you can easily move and work close to trees, buildings and other obstacles. Models CT2025 and up include steering brakes, depending on transmission type, which allows you to nearly pivot the tractor on the inside wheel.

HIGH GROUND SPEED

With top travel speeds as high as 18.5 mph (depending on model), you'll spend less time moving from one point to another, and you'll make every second count when you have work to get done.



Machine: CT4058
Attachment: Pallet Fork
Implement: Tiller

VERSATILITY

ENOUGH CAPABILITY TO KEEP YOU OUT OF THE HOUSE ALL DAY.

From mowing to grading to digging, your property presents endless opportunities to get outside and get something done. From front to back, Bobcat tractors are well equipped for it.



FRONT-END LOADER WITH STANDARD QUICK ATTACH MOUNTING SYSTEM

The optional front-end loader is a must-have for digging, dirt moving, loading and carrying material. The Bobcat front-end loader is easy to attach and remove and delivers leading lift capacity and height for exceptional productivity. The quick-tach mounting system enables you to use a variety of attachments, such as a grapple, pallet fork, combination bucket or angle blade. Front-end loaders are also equipped with float functionality to follow ground contours as you work.

IMPLEMENTS AND ATTACHMENTS

Your compact tractor packs a lot of versatility for the price, and hard-working Bobcat implements and attachments are made to handle the numerous possibilities you uncover on your land. Bobcat provides you access to a world of Bobcat implements and front-end loader attachments – so you can get the most work from your tractor investment. Whether it's moving snow, installing a fence, or taking care of animals, when you have the right tractor and the right implement or attachment, there is virtually no task that's beyond your ability.

There is an extensive dealership network across North America, so you're never far from an expert source for implements, attachments, accessories, parts and service.



Machine: CT4058
Attachment: Pallet Fork
Implement: Tiller

TIRE OPTIONS

Three types of tires are available for Bobcat compact tractors. They offer a combination of reliability and ride quality to match the requirements of your work.

AGRICULTURAL TIRES

These tough tires have deep lugs for optimal traction and self-cleaning in soft soil and mud. They also deliver more power to the ground when towing heavy loads or pulling implements.

TURF TIRES

Turf tires are designed with less aggressive tread that minimizes disturbance on lush lawns and established landscaping.

INDUSTRIAL TIRES

Industrial tire tread is wider than agricultural tires, and the lugs are deeper than turf tires. They deliver great traction for all ground conditions and many different applications.

ATTACHMENTS

- Backhoe
- Front-end loader
- Front-mount snowblower
- Mid-mount mower (on select models)



Backhoe



Front-mount snowblower

IMPLEMENTS

- 3-point angle blade
- 3-point auger
- 3-point box blade
- 3-point finish mower
- 3-point rotary cutter
- 3-point snowblower
- 3-point tiller
- Seeder (on select models)
- Quick hitch
- Rear ballast
- Tine rake



3 pt. angle blade



3 pt. auger



3 pt. box blade



3 pt. rotary cutter



3 pt. tiller



Tine rake

3-POINT HITCH



HOOK UP THE POSSIBILITIES.

Put more tasks behind you with your 3-point hitch and PTO. These features are the keys to your tractor's versatility, and they enable you to do a large number of tasks on your property with both drag-behind and PTO-powered implements. Every Bobcat compact tractor makes it as easy as possible for you to hook up and remove implements as needed, and many models come with premium features such as adjustable, turnbuckle or cassette style sway bars (depending on model) or crank style lower link adjustment.



Machine: CT5550
Attachment: Bucket
Implement: Seeder



Machine: CT5558
Implement: Tiller

ADJUSTABLE HITCH

The hitch is adjustable to provide towing flexibility and convenience.

FLIP-UP PTO GUARD

The flip-up PTO guard ensures low-effort attachment installation while still providing operator protection during use.

ANGLED LOWER LIFT ARMS

The lower lift arms provide a forgiving angled design that makes implement hookup quick and easy.

MID-PTO OPTION

Enjoy superior maneuverability for mowing around trees, buildings and other obstacles with a 2,000-rpm mid-PTO and mid-mount mower.

With a mid-PTO, you have the option of combining two tools on one machine – one in the back and either one in the front or a mid-mount mower.



Machine: CT2540

UPTIME & SERVICEABILITY

IT TAKES ONE TOUGH ANIMAL[®] TO KNOW ONE.

From rugged metal hoods to the solid and sturdy construction of our 3-point hitches to our unmatched dealer support, your Bobcat tractor can stand up to a challenge.

METAL HOOD

The metal hood on most models, designed to provide great visibility from the operator station, stands up to tough jobs, reliably protecting the engine and components from dirt and debris.

POLYMER FUEL TANK

A heavy-duty polymer fuel tank maintains fuel integrity and eliminates rust-related contamination.

BRUSH GUARD

Included with the optional front-end loader, the heavy-duty brush guard protects your tractor's front end from debris, branches and other obstacles.

ONE-PIECE ENGINE HOOD WITH AIR CYLINDER ASSIST

There are no side panels to remove when you need to access your engine. Just lift the hood. With the air cylinder assist, it takes little effort. When fully opened, the tractor's hood stands nearly perpendicular to the engine compartment. This provides best-in-class maintenance accessibility and makes virtually all of the major service points easy to reach.

24-MONTH, 1,500-HOUR WARRANTY

Bobcat Company stands behind your tractor. Our standard warranty provides 24 months of coverage from defects in material and workmanship or 1,500 hours of usage (whichever occurs first).



Machine: CT1021

Your chores demand daily attention, and your Bobcat tractor is designed to be ready to go to work when you are. They're built to contend with the dust, dirt and grit of your toughest tasks and designed with ease of maintenance in mind.



Machine: CT2025

THE BOBCAT DEALER NETWORK

Bobcat has built its brand on quality equipment – serviced by reliable dealers who provide local access to authorized service, warranty repairs and parts availability that's second to none. With the help of our knowledgeable dealers, Bobcat customers have kept machines running for decades doing the toughest jobs imaginable. If you're looking for long-term service and support, Bobcat compact tractors deserve a serious look.

ONE-SIDE MAINTENANCE

On most models, all daily checks, engine fluid fills and filters are located on one side of the engine – so you can keep your tractor running smoothly with minimal effort. Just flip up the metal hood – it opens nearly 90 degrees – and easily access the battery, filters and other checkpoints.



Machine: CT5558

CONQUER THE JOB IN TOTAL COMFORT.

PANORAMIC VISIBILITY

Inside the optional cab, you'll notice panoramic visibility – made possible with wide glass panels and minimal obstruction from the inside and outside. A window to the 3-point hitch ensures that you can monitor implement performance without having to frequently step out of the cab.

Open cab models provide excellent sightlines to the work and great all-around visibility, plus additional simplicity and ease of use for operators who frequently get on or off the tractor throughout the day.

HEADLIGHTS

Bright headlights illuminate the job for high visibility for evening work and other low light conditions.

LED TAIL LAMP

Provides excellent visibility and long bulb life.

LOW-NOISE, LOW-VIBRATION ENGINE

The engine in your Bobcat compact tractor is designed to produce low noise levels with minimal vibration to keep you working comfortably and focused on the task.

Machine: CT5550




When you have hours of mowing and acres of upkeep ahead of you, a comfortable tractor is a must. Bobcat compact tractors offer outstanding features that make tough jobs comfortable and enjoyable. Intuitive controls that fit you naturally. A comfortable ride. Quiet engines that help you focus on the job. A deluxe suspension seat that adjusts to you. When the projects pile up, you won't mind spending extra time on this tractor.



Machine: CT5558

COMFORTABLE OPERATOR STATION WITH ERGONOMIC CONTROLS

The operator station on Bobcat compact tractors is designed to enable hours of comfortable, confident work. All of the controls, gauges and buttons on Bobcat compact tractors are thoughtfully laid out with operator ease of use in mind. The illuminated dashboard allows you to operate and easily monitor performance in all light conditions.

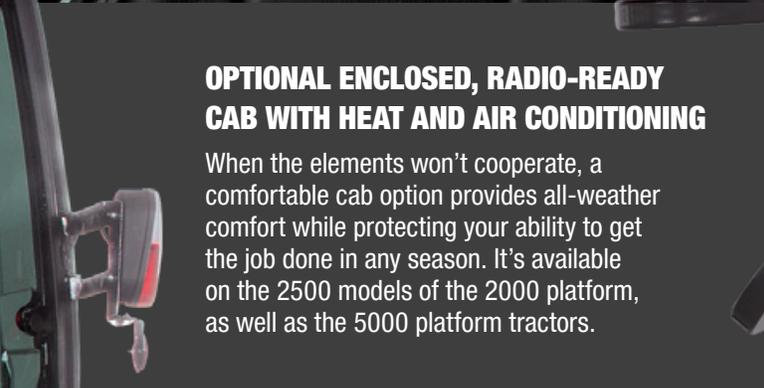

OPTIONAL ENCLOSED, RADIO-READY CAB WITH HEAT AND AIR CONDITIONING

When the elements won't cooperate, a comfortable cab option provides all-weather comfort while protecting your ability to get the job done in any season. It's available on the 2500 models of the 2000 platform, as well as the 5000 platform tractors.



Machine: CT5558



FOLDABLE ROLL-OVER PROTECTIVE STRUCTURE (ROPS)

The ROPS is designed to protect the operator in the event of a rollover (when the ROPS is locked in the up position and the seat belt is fastened). The foldable ROPS can be temporarily lowered when driving under trees, into garages or in other low-clearance areas.

Machine: CT1021

SPECIFICATIONS 1000 SERIES



Model	CT1021	CT1025
Engine	Diesel	Diesel
Gross Horsepower	21.0 hp (15.7 kW)	24.5 hp (18.3 kW)
No. of Cylinders	3	3
Total Displacement	61.4 cu. in. (1.0 L)	61.4 cu. in. (1.0 L)
Fuel Tank Capacity	6.7 gal. (25.5 L)	6.7 gal. (25.5 L)
3-Point, PTO & Hydraulics		
3-Point Hitch	Category 1 Limited	Category 1 Limited
3-Point Lift Capacity*	700 lb. (318 kg)	700 lb. (318 kg)
3-Point Link Stabilizers	Turnbuckle	Turnbuckle
Lift Control Type	Hydraulic Position Control System	Hydraulic Position Control System
Lifting Rod	Turnbuckle	Turnbuckle
Lower Links	Rigid	Rigid
Mid-PTO	Standard: 2200 rpm	Standard: 2200 rpm
PTO Horsepower	16.3 hp (12.1 kW)	18.8 hp (14.0 kW)
Rear Hydraulics (optional)	1 Pair	1 Pair
Rear PTO	540 rpm	540 rpm
Rear PTO System	Independent	Independent
Total Hydraulic Pump Capacity	7.2 gpm (27.4 L/min.)	7.2 gpm (27.4 L/min.)
Drive System		
Transmission	2-Range HST	2-Range HST
Brakes	Wet Multi-Disc	Wet Multi-Disc
Rear Differential Lock	Std	Std
Four-Wheel Drive	Std	Std
Travel Speeds (w/ Ind. Tires)		
Forward	11.1 mph (17.8 km/hr.)	11.1 mph (17.8 km/hr.)
Reverse	7.6 mph (12.2 km/hr.)	7.6 mph (12.2 km/hr.)
Dimensions		
Overall Length (w/ 3 pt.)	99.3 in. (2522 mm)	99.3 in. (2522 mm)
Overall Width (w/ industrial tires)	46.0 in. (1161 mm)	46.0 in. (1161 mm)
Overall Height	87.6 in. (2225 mm)	87.6 in. (2225 mm)
Wheelbase	55.1 in. (1400 mm)	55.1 in. (1400 mm)
Ground Clearance	6.3 in. (160 mm)	6.3 in. (160 mm)
Weight	1521 lb. (690 kg)	1521 lb. (690 kg)
Steering	Hydrostatic Power Steering	Hydrostatic Power Steering
Inside Turning Radius	100.0 in. (2540 mm)	100.0 in. (2540 mm)
Tilt Steering Wheel	—	—
Safety Equipment		
Safety Interlock System (neutral start-operating)	Std	Std
Fold-Down ROPS (roll-over protective structure)	Std	Std
Fully Retractable Seat Belt	Std	Std
Features		
Adjustable Seat	Std	Std
Cup Holder	Std	Std
Glow Plug Engine Preheat	Std	Std
Toolbox	Std	Std
Head Lights/Tail Lights/Brake Lights	Std	Std
Cruise Control	Opt	Opt
Spark Arrestor Muffler	Opt	Opt
Horn/Hazard Flasher/Turn Signals	Std	Std
Rear Working Light	Opt	Opt
Side Mirror	—	—
Dealer-Installed Cab With Heat	Opt	Opt

*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.



Machine: CT1021

SPECIFICATIONS 2000 SERIES



Model	CT2025 HST	CT2025 MST	CT2035 HST	CT2035 MST	CT 2535 HST	CT2040 HST	CT2040 MST	CT2540 HST
Engine	Diesel							
Gross Horsepower	24.5 hp (18.2 kW)	24.5 hp (18.2 kW)	34.9 hp (26.0 kW)	34.9 hp (26.0 kW)	34.9 hp (26.0 kW)	39.6 hp (29.5 kW)	39.6 hp (29.5 kW)	37.6 hp (28.0 kW)
No. of Cylinders	3	3	3	3	3	3	3	3
Total Displacement	100 cu. in. (1.6 L)	100 cu. in. (1.6 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)	111.4 cu. in. (1.8 L)
Fuel Tank Capacity	9.0 gal. (34.1 L)							
3-Point, PTO & Hydraulics								
3-Point Hitch	Category 1							
3-Point Lift Capacity*	1631 lb. (740 kg)							
3-Point Link Stabilizers	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Telescoping	Turnbuckle	Turnbuckle	Telescoping
Lift Control Type	Hydraulic Position Control System							
Lifting Rod	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Crank	Turnbuckle	Turnbuckle	Crank
Lower Links	Fixed	Fixed	Fixed	Fixed	Telescopic	Fixed	Fixed	Telescopic
Mid-PTO	Optional: 1976 rpm	Optional: 1976 rpm	Optional: 1988 rpm					
PTO Horsepower	21.8 hp (16.3 kW)	22.2 hp (16.6 kW)	29.4 hp (21.9 kW)	30.8 hp (23.0 kW)	29.4 hp (21.9 kW)	31.9 hp (23.8 kW)	34.9 hp (26.0 kW)	31.9 hp (23.8 kW)
Rear Hydraulics	2 Pairs Opt	2 Pairs Opt	2 Pairs Opt	2 Pairs Opt	2 Pairs Std	2 Pairs Opt	2 Pairs Opt	2 Pairs Std
Rear PTO	540 rpm							
Rear PTO System	Live	Live	Live	Live	Independent	Live	Live	Independent
Total Hydraulic Pump Capacity	11.4 gpm (42.9 L/min.)							
Drive System								
Transmission	3-Range HST	9F x 3R Manual	3-Range HST	9F x 3R Manual	3-Range HST	3-Range HST	9F x 3R Manual	3-Range HST
Brakes	Wet Multi-Disc							
Rear Differential Lock	Std							
Four-Wheel Drive	Std							
Travel Speeds (w/ Ind. Tires)								
Forward	9.7 mph (15.6 km/hr.)	9.4 mph (15.2 km/hr.)	14.4 mph (23.1 km/hr.)	14.1 mph (22.7 km/hr.)	14.4 mph (23.1 km/hr.)	14.4 mph (23.1 km/hr.)	14.1 mph (22.8 km/hr.)	14.4 mph (23.1 km/hr.)
Reverse	8.7 mph (14.0 km/hr.)	6.2 mph (9.9 km/hr.)	12.9 mph (20.8 km/hr.)	9.3 mph (14.9 km/hr.)	10.1 mph (16.2 km/hr.)	12.9 mph (20.8 km/hr.)	9.3 mph (14.9 km/hr.)	10.1 mph (16.2 km/hr.)
Dimensions								
Overall Length (w/ 3 pt.)	120.9 in. (3070 mm)							
Overall Width (w/ industrial tires)	63.4 in. (1610 mm)	63.0 in. (1600 mm)	63.4 in. (1610 mm)	63.4 in. (1610 mm)	63.0 in. (1600 mm)			
Overall Height	91.5 in. (2324 mm)	91.0 in. (2311 mm)	91.5 in. (2324 mm)	91.5 in. (2324 mm)	91.0 in. (2311 mm)			
Wheelbase	65.7 in. (1670 mm)							
Ground Clearance	11.5 in. (292 mm)	12.3 in. (311 mm)	11.5 in. (292 mm)	11.5 in. (292 mm)	12.3 in. (311 mm)			
Weight	2634 lb. (1195 kg)	2634 lb. (1195 kg)	3005 lb. (1363 kg)	3005 lb. (1363 kg)	3585 lb. (1626 kg)	3005 lb. (1363 kg)	3005 lb. (1363 kg)	3585 lb. (1626 kg)
Steering	Hydrostatic Power Steering							
Inside Turning Radius	96.5 in. (2450 mm)	106.2 in. (2700 mm)	96.5 in. (2450 mm)	96.5 in. (2450 mm)	106.2 in. (2700 mm)			
Tilt Steering Wheel	—	—	—	—	Std	—	—	Std
Safety Equipment								
Safety Interlock System (neutral start-operating)	Std							
Fold-Down ROPS (roll-over protective structure)	Std	Std	Std	Std	—	Std	Std	—
Fully Retractable Seat Belt	Std							
Features								
Adjustable Seat	Std							
Cup Holder	Std							
Glow Plug Engine Preheat	Std							
Toolbox	Opt	Opt	Opt	Opt	Std	Opt	Opt	Std
Head Lights/Tail Lights/ Brake Lights	Std							
Cruise Control	Opt	Opt	Opt	Opt	Std	Opt	Opt	Std
Spark Arrestor Muffler	Opt	Std						
Horn/Hazard Flasher/ Turn Signals	Std							
Rear Working Light	Opt	Opt	Opt	Opt	Std	Opt	Opt	Std
Side Mirror	Opt	Opt	Opt	Opt	Std	Opt	Opt	Std
Enclosed Cab With Heat/AC	—	—	—	—	Std	—	—	Std

*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.

SPECIFICATIONS

4000 SERIES



Model	CT4045 HST	CT4045 SST	CT4050 HST	CT4050 SST	CT4055 SST	CT4058 HST
Engine	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Gross Horsepower	44.9 hp (33.5 kW)	44.9 hp (33.5 kW)	50.3 hp (37.3 kW)	50.3 hp (37.3 kW)	55.0 hp (41.0 kW)	57.7 hp (43.0 kW)
No. of Cylinders	3	3	3	3	3	3
Total Displacement	111.4 cu. in. (1.8 L)					
Fuel Tank Capacity	12.7 gal. (48.0 L)	11.9 gal. (45.0 L)	12.7 gal. (48.0 L)	11.9 gal. (45.0 L)	11.9 gal. (45.0 L)	12.7 gal. (48.0 L)
3-Point, PTO & Hydraulics						
3-Point Hitch	Category 1					
3-Point Lift Capacity*	2716 lb. (1232 kg)					
3-Point Link Stabilizers	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle
Lift Control Type	Hydraulic Position Control System					
Lifting Rod	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle
Lower Links	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid
Mid-PTO	Optional: 2119 rpm	—	Optional: 2119 rpm	—	—	Optional: 2119 rpm
PTO Horsepower	32.8 hp (24.5 kW)	41.6 hp (31.0 kW)	39.3 hp (29.3 kW)	45.6 hp (34.0 kW)	49.6 hp (37.0 kW)	45.1 hp (33.7 kW)
Rear Hydraulics	1 Pair Std (2nd Pair Opt)	Opt 2 Pairs	1 Pair Std (2nd Pair Opt)	Opt 2 Pairs	Opt 2 Pairs	1 Pair Std (2nd Pair Opt)
Rear PTO	540 rpm					
Rear PTO System	Independent	Independent	Independent	Independent	Independent	Independent
Total Hydraulic Pump Capacity	16.5 gpm (62.4 L/min.)	14.1 gpm (53.4 L/min.)	16.5 gpm (62.4 L/min.)	16.5 gpm (62.4 L/min.)	14.1 gpm (53.4 L/min.)	16.5 gpm (62.5 L/min.)
Drive System						
Standard Transmission	3-Range HST	8F X 8R Synchro	3-Range HST	8F X 8R Synchro	8F X 8R Synchro	3-Range HST
Brakes	Wet Multi-Disc					
Rear Differential Lock	Std	Std	Std	Std	Std	Std
Four-Wheel Drive	Std	Std	Std	Std	Std	Std
Travel Speeds (w/ Ind. Tires)						
Forward	18.5 mph (29.7 km/hr.)	17.5 mph (28.2 km/hr.)	18.5 mph (29.7 km/hr.)	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)	18.5 mph (29.7 km/hr.)
Reverse	12.9 mph (20.8 km/hr.)	17.1 mph (27.6 km/hr.)	12.9 mph (20.8 km/hr.)	17.1 mph (27.5 km/hr.)	17.1 mph (27.1 km/hr.)	12.9 mph (20.8 km/hr.)
Dimensions						
Overall Length (w/ 3 pt.)	125.5 in. (3189 mm)					
Overall Width (w/ industrial tires)	69.8 in. (1722 mm)					
Overall Height	97.4 in. (2473 mm)					
Wheelbase	71.2 in. (1810 mm)					
Ground Clearance (w/ industrial tires)	15.3 in. (387 mm)					
Weight	3745 lb. (1698 kg)					
Steering						
	Hydrostatic Power Steering					
Inside Turning Radius (w/ assisted braking)	103.5 in. (2630 mm)					
Tilt Steering Wheel	Std	Std	Std	Std	Std	Std
Safety Equipment						
Safety Interlock System (neutral start-operating)	Std	Std	Std	Std	Std	Std
Fold-Down ROPS (roll-over protective structure)	Std	Std	Std	Std	Std	Std
Fully Retractable Seat Belt	Std	Std	Std	Std	Std	Std
Features						
Adjustable Seat	Std	Std	Std	Std	Std	Std
Cup Holder	Std	Std	Std	Std	Std	Std
Glow Plug Engine Preheat	Std	Std	Std	Std	Std	Std
Toolbox	Std	Std	Std	Std	Std	Std
Head Lights/Tail Lights/Brake Lights	Std	Std	Std	Std	Std	Std
Cruise Control	Opt	—	Opt	—	—	Opt
Spark Arrestor Muffler	Std	Std	Std	Std	Std	Std
Horn/Hazard Flasher/Turn Signals	Std	Std	Std	Std	Std	Std
Rear Working Light	Opt	Opt	Opt	Opt	Opt	Opt
Side Mirror	Opt	Opt	Opt	Opt	Opt	Opt
Enclosed Cab With Heat/AC	—	—	—	—	—	—

*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.

SPECIFICATIONS

5000 SERIES



Model	CT5545 E-HST	CT5550 E-HST	CT5555 E-HST	CT5558 E-HST
Engine	Diesel	Diesel	Diesel	Diesel
Gross Horsepower	45.0 hp (33.5 kW)	50.0 hp (37.5 kW)	55.0 hp (41.0 kW)	57.7 hp (43.0 kW)
No. of Cylinders	3	3	3	3
Total Displacement	111.4 cu. in. (1.8 L)			
Fuel Tank Capacity	14.8 gal. (56.0 L)			
3-Point, PTO & Hydraulics				
3-Point Hitch	Category 1	Category 1	Category 1	Category 1
3-Point Lift Capacity*	3177 lb. (1441 kg)			
3-Point Link Stabilizers	Telescopic	Telescopic	Telescopic	Telescopic
Lift Control Type	Position With Draft Control			
Lifting Rod	Crank	Crank	Crank	Crank
Lower Links	Telescopic	Telescopic	Telescopic	Telescopic
Mid-PTO	Optional: 2103 rpm	Optional: 2103 rpm	Optional: 2103 rpm	Optional: 2103 rpm
PTO Horsepower	33.9 hp (25.3 kW)	38.9 hp (29.0 kW)	43.1 hp (32.1 kW)	48.3 hp (36.0 kW)
Rear Hydraulics	1 Pair Std (2nd and 3rd Opt)			
Rear PTO	540 rpm	540 rpm	540 rpm	540 rpm
Rear PTO System	Independent	Independent	Independent	Independent
Total Hydraulic Pump Capacity	17.8 gpm (67.6 L/min.)			
Drive System				
Standard Transmission	3-Range E-HST	3-Range E-HST	3-Range E-HST	3-Range E-HST
Brakes	Wet Multi-Disc	Wet Multi-Disc	Wet Multi-Disc	Wet Multi-Disc
Rear Differential Lock	Std	Std	Std	Std
Four-Wheel Drive	Std	Std	Std	Std
Travel Speeds (with ind. tires)				
Forward	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)
Reverse	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)	17.5 mph (28.2 km/hr.)
Dimensions				
Overall Length (w/ 3 pt.)	139.6 in. (3547 mm)			
Overall Width (w/ industrial tires)	74.2 in. (1885 mm)			
Overall Height	94.2 in. (2393 mm)			
Wheelbase	75.6 in. (1920 mm)			
Ground Clearance (w/ industrial tires)	13.0 in. (330 mm)			
Weight	4685 lb. (2125 kg)			
Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering	Hydrostatic Power Steering
Inside Turning Radius (w/ assisted braking)	117.6 in. (2990 mm)			
Tilt Steering Wheel	Std	Std	Std	Std
Safety Equipment				
Safety Interlock System (neutral start-operating)	Std	Std	Std	Std
Fold-Down ROPS (roll-over protective structure)	—	—	—	—
Fully Retractable Seatbelt	Std	Std	Std	Std
Features				
Adjustable Seat	Std	Std	Std	Std
Cup Holder	Std	Std	Std	Std
Glow Plug Engine Preheat	Std	Std	Std	Std
Toolbox	Std	Std	Std	Std
Head Lights/Tail Lights/ Brake Lights	Std	Std	Std	Std
Cruise Control	Std	Std	Std	Std
Spark Arrestor Muffler	Std	Std	Std	Std
Horn/Hazard Flasher/Turn Signals	Std	Std	Std	Std
Rear Working Light	Std	Std	Std	Std
Side Mirror	Std	Std	Std	Std
Enclosed Cab With Heat/AC	Std	Std	Std	Std

*Note: Hydraulic 3 pt. lift capacity will vary depending on lift point height.

One Tough




B O B C A T T I M E L I N E



h Animal[®]



Machine: GT1025
Attachment: Bucket

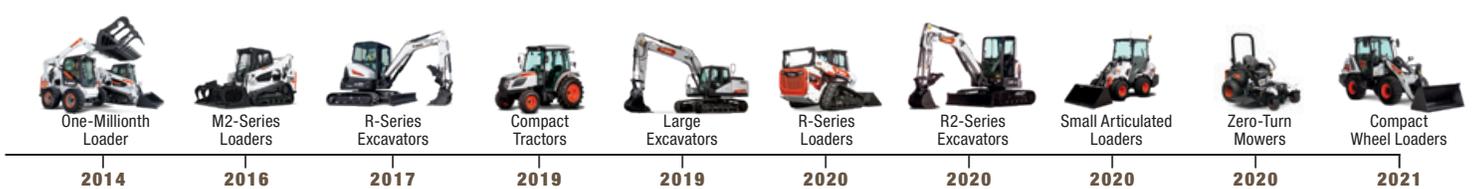



YOU ARE ONE TOUGH ANIMAL.®

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.

DOOSAN

Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat®, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries. ©2024 Bobcat Company. All rights reserved.



Printed on 10% recycled paper

B-2279 (03/24)
EP-10M-0324-10361-F

Bobcat Company
250 East Beaton Drive • West Fargo, ND 58078

Bobcat.com



Bobcat®

One Tough Animal.